

Technical Documentation


PDH1/545

Optim TEFC | AEHH8N

Date: July 10, 2017

Dimensional Drawing

Catalogue	Model	HP	Pole	kW	Rating	Voltage	Hz	RPM
PDH1/545	AEHH8N	1.5	4	1.1	Continuous	575 V	60	1800

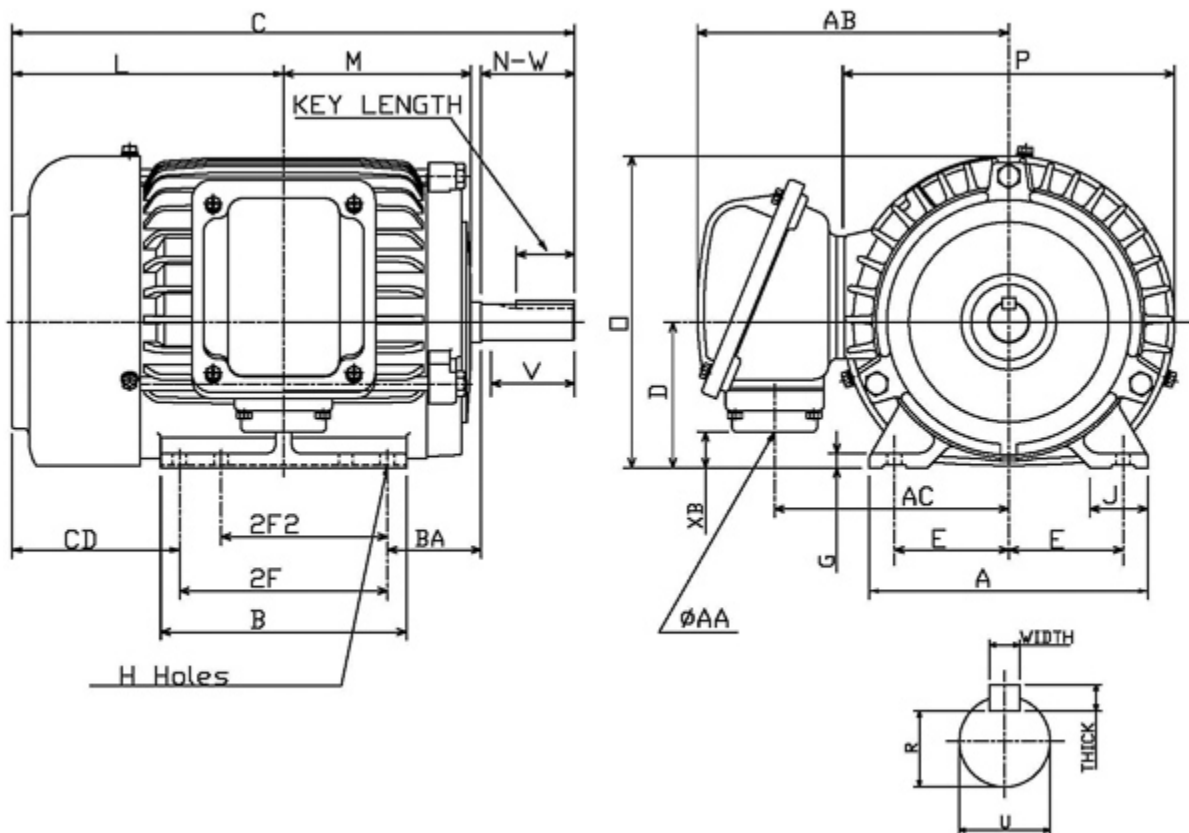

Frame Size		Mounting					A	B	C	CD	D
		E	2F	2F2	H	BA					
145T		2.75	5	4	0.34	2.25	6.7	5.9	13.32		3.5

G	J	K	L	M	O	P	T	Key			Keyseat
								Width	Thick	Length	R
0.35	1.4		6.32	4.53	7.48	7.97		0.188	0.188	1.41	0.771

Terminal Housing				Aux Box		C/D Flange					
AA	AB	AC	XB	AE	AX	BB	AH	AK	BD	AJ	BF
3/4 NPT	7.56	5.63	0.86								

Shaft Extension			Bearings		Approx. Weight Lbs	SPL dBA/3ft	Ins. Class	S.F.	Drive Method	Dimensions
N-W	U	V	DE	NDE						
2.25	0.875	2.2	6205ZZ	6205ZZ	57	50	F	1.15	Direct Coupling / Belt Drive	Inches

Technical Data Sheet

Motor Type: AEHH8N

Catalogue No: PDH1/545

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
1.5	4	1730	145T	575	60	3
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.15	Continuous	B	-40 to 40 °C	<3300 ft

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
86.5	84.0	86.5	85.5	78.0	70.0	57.0
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
4.55	300	260	360	0.9	1.7	16
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	
M	0.093	8.6	47.0	57	40	50

VFD Duty Information

Speed Range			VFD		S.F.
Constant Torque	Variable Torque	Constant Power	Carrier	Type	
6-60Hz	3-60Hz	60-120Hz	≤ 5 kHz	VPWM or CPWM	1.0 Only

Additional Information

Bearings		Approx. Weight
DE	NDE	lbs
6205ZZ	6205ZZ	57

Hazardous Locations Information


CSA Certified	
Class I, Div 2, Groups B, C & D Class I, Zone 2, Groups IIB+H2, IIB & IIA	
Temp Code (Sinewave / VFD)	T3C / T3C

Nameplate Drawing

Optim TEFC

TYPE	AEHH8N	CAT. NO.	PDH1/545		
OUTPUT	1.5 HP 1.1 kW	FRAME	145T	TEFC	
R.P.M.	1730	POLE	4	INS.	F
VOLTS	575	PHASE	3	Hz	60
AMPS	1.7	CODE	M	S.F.	1.15
AMBIENT	40 °C	NOM. EFF. 86.5		MIN. EFF. 84.0	
BEARINGS	6205ZZ / 6205ZZ			RATING Cont.	
SER. NO.	TBD		DESIGN	B	WT. 57 LBS
PWM VFD DUTY	VT	CT	CP	S.F.	
	3-60Hz	6-60Hz	60-120Hz	1.0 Only	

Connection Diagram

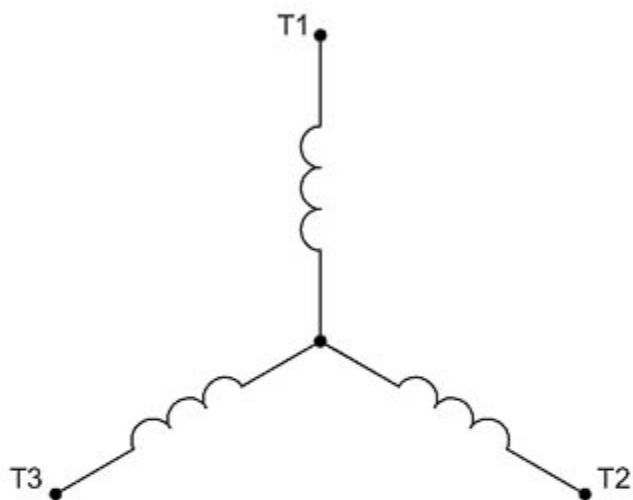


3 LEAD		SINGLE VOLTAGE			WYE
VOLTAGE	CONN.	L1	L2	L3	
-	WYE	1	2	3	

WD_3Y

Thermal Limit Curves

Motor Type: AEHH8N		Catalogue No: PDH1/545		Family: Optim TEFC	
HP	1.5	Safe Stall Time		Full Load A	0.0 / 1.7 A
Voltage	0 / 575V 60Hz	Hot	40 s	Locked Rotor A	958 %
RPM	1800	Cold	57 s	Locked Rotor A	0.0 / 16 A

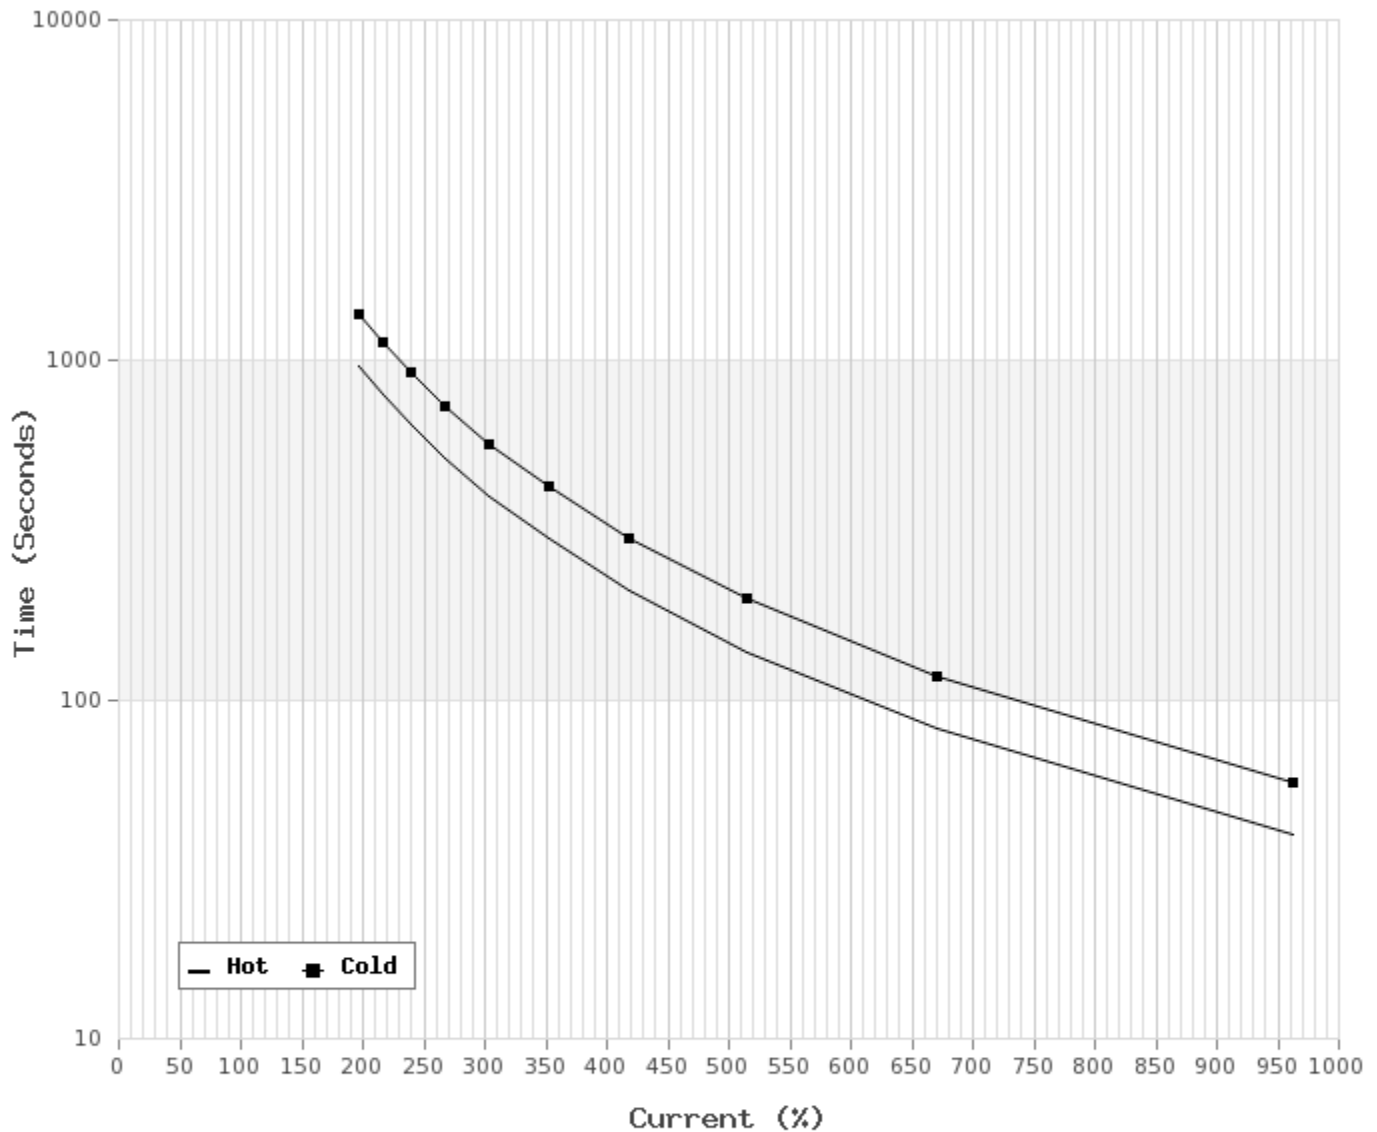

T-N and I-N Curves

Motor Type: AEHH8N		Catalogue No: PDH1/545		Family: Optim TEFC	
HP	1.5	Full Load T	4.55 lb-ft	Full Load A	1.7 A
Voltage	575V 60Hz	Locked Rotor T	300 %	Locked Rotor A	16.0 A
RPM	1800	Pull Up T	260 %	Break Down T	360 %

