

DATA SHEET

Premium Efficiency Motor: **PEWWE50-36-326JP**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 16-Feb-2023

Document ID:

Customer:

MOTOR INFORMATION

HP	50
RPM	3600
Phase	3
Frequency	60 Hz
Voltage	230/460 V
Frame Size	326JP
Enclosure	TEFC
Degree of Protection	IP55
Service Factor	1.25
Poles	2
Full Load Speed	3545
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	G
Duty Cycle	S1 / Continuous
Slip	1.53%
NEMA Design	B
Moment of Inertia	3.42 lb.ft.^2
Locked Rotor Time (Hot)	18 seconds
Sound Pressure Level	77 dB(A)
Number of Starts	2 Cold/1 Hot
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bi-Directional
Area of Classification	Class I, Division 2, Groups A, B, C, D
Inverter Rating	10:1 CT / 20:1 VT PWM Type
Standard	NEMA MG-1
Approvals	CSA-US, CE

EFFICIENCY/POWER FACTOR

LOAD	EFF	P. F.
100%	93.0 %	0.89
75%	93.4 %	0.86
50%	93.1 %	0.8

TORQUE

FULL LOAD	LRT	BDT
74 lb.ft.	180 %	260 %

AMPERAGE INFORMATION

	230V	460V
Full Load Amps	113A	56.6A
Locked Rotor Amps	725A	362.5A
No Load Current	30.2A	15.1A
Usable at 208V	125A	

BEARING INFORMATION

DE Bearing	6312 C3
ODE Bearing	6311 C3
Grease Type	SKF LGHP 2
DE Regreasing Interval	2400 Hours
ODE Regreasing Interval	2400 Hours

ADDITIONAL DATA

F2 Suitable	Yes
Shaft Material	1045 Carbon Steel
Connection Diagram	230 / 460 V - 12 Lead Δ
Approximate Weight	534 lbs.


MOTOR DRAWING

Premium Efficiency Motor: **PEWWE50-36-326JP**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

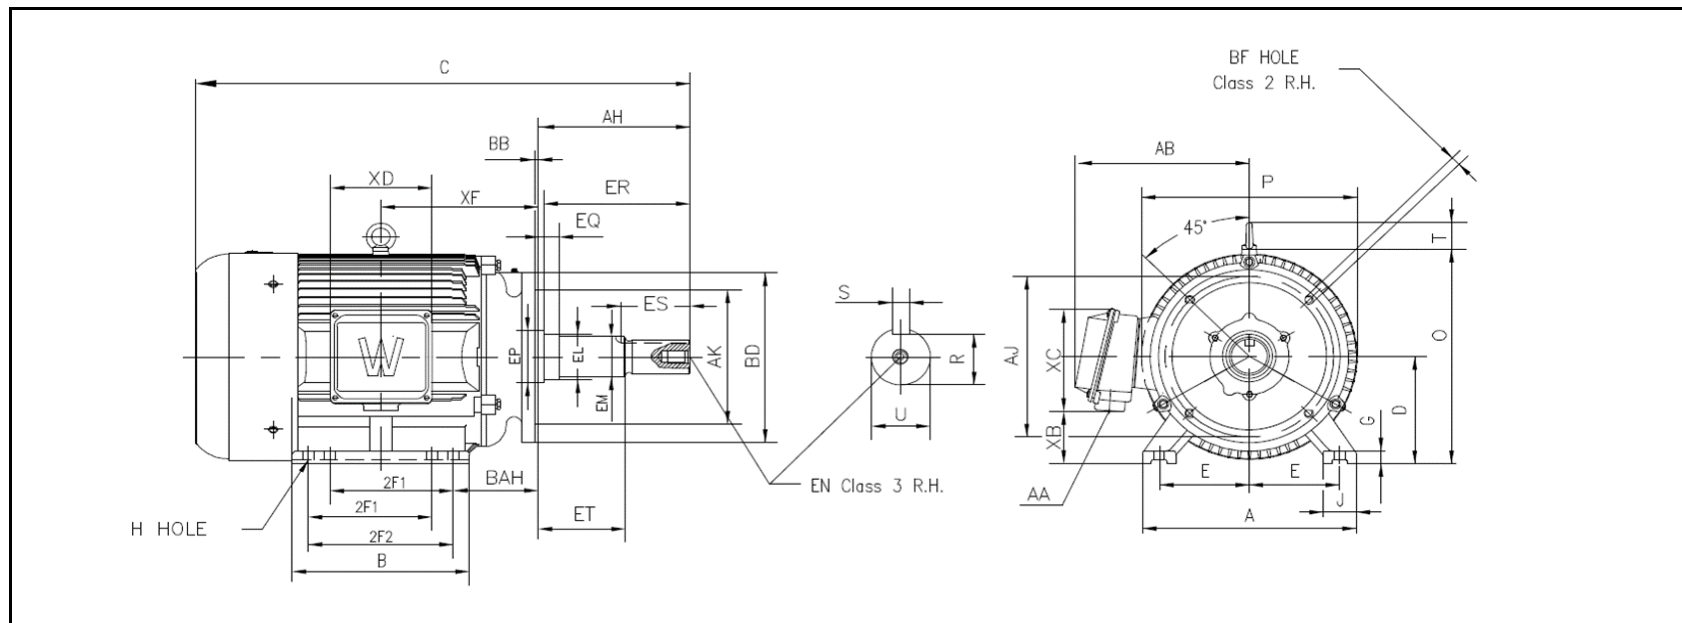

DIMENSION - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F	H	BAH										
6.25	10.5	12	0.66	5.5	16	15	34.5	8	0.99	2.8	15.7	16	2.44	14.5

SHAFT & KEY												
S	ES	R	AH	EQ	ET	EM	EL	EP	ER	EN	U	
0.252	2.56	1.112	8.125	2.375	5.875	1.375	1.75	2.36	8.34	1/2-13	1.249	

FLANGE				
AJ	AK	BB	BD	BF
11	12.5	0.275	13.8	5/8-11

TERMINAL BOX				
AA	XB	XC	XD	XF
2	2.4	10.8	9	11.5

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:



PEWWE50-36-326JP

Document Generated: 16-Feb-2023

Document ID:

Customer:

Motor Type	PEWWE				
Output Rating (HP)	50		FL Speed	3545	
Full Load Torque	74 lb.ft		LRT (%FLT)	180	460 volt FLA 56.6
Rotor Wk^2	3.42 lb-ft^2		BDT (%FLT)	260	230 volt FLA 113

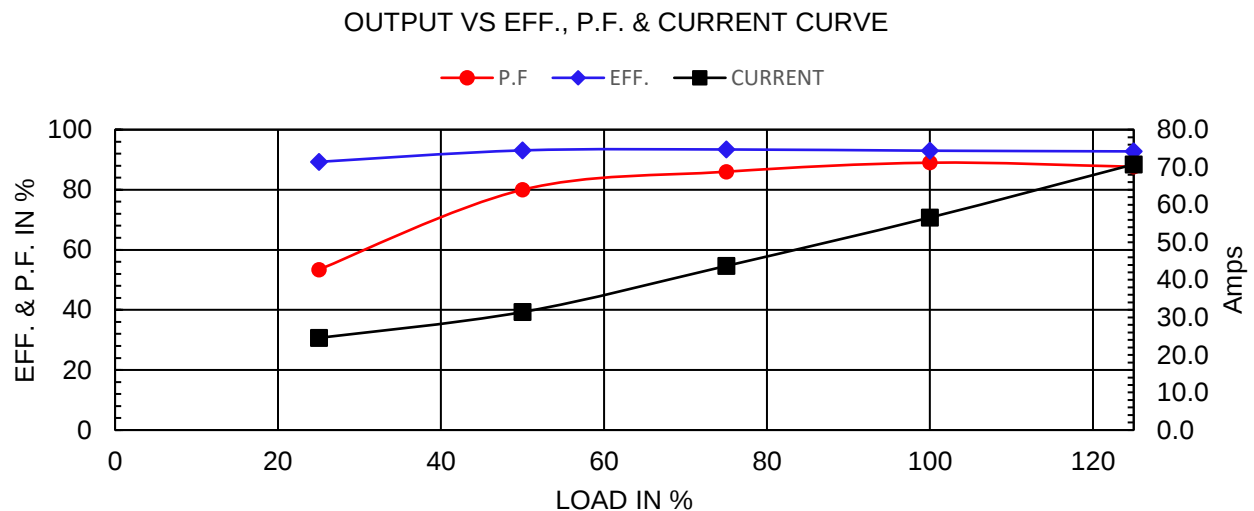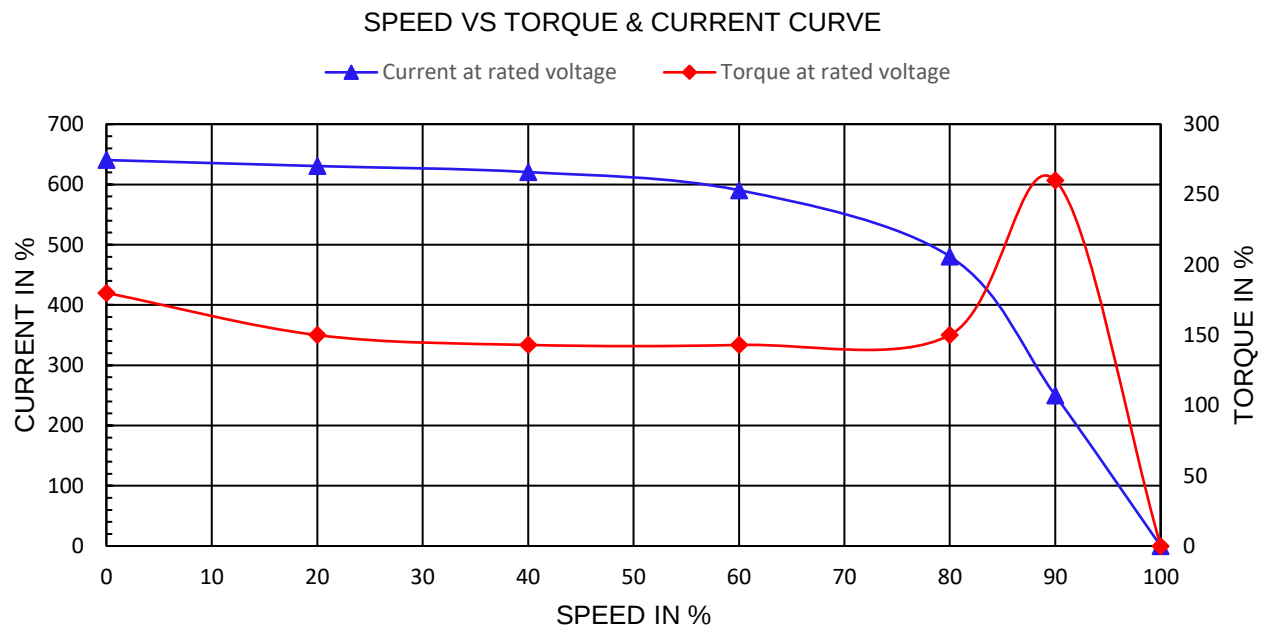

NAMEPLATE / WIRING

Premium Efficiency Motor:

PEWWE50-36-326JP

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 16-Feb-2023
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		NEMA Premium		3-PHASE INDUCTION MOTOR		259277 	 CC006A
Model			Ser No.			Low Voltage	
HP		S.F.		IP		Encl	
Frame		P.F.		Code		Type	
Voltage	230/460	Hz		Ins Cl		Rating	°C Amb Cont
Amps		RPM		Design		Date	
Nom.Eff.	FL	% 3/4		% 230/460 V	10:1 CT 20:1 VT PWM VFD	1.0SF	
				DE Brng		High Voltage	
Class I DIV. 2 Groups A B C D				Amb.40°C		ODE Brng	
Class I Zone 2 IIC				Amb.55°C		Grease type: LGHP 2 (compatible with polyrex)	
50Hz		HP		V		A	rpm
WorldWide Electric Corporation							

Model	PEWWE50-36-326JP						
HP	50	S.F.	1.25	IP	IP55	Encl	TEFC
Frame	326JP	P.F.	0.89	Code	G	Type	
Voltage	230/460 V	Hz	60 Hz	Ins Cl	F	Ambient	40°C
Amps	113/56.6	RPM	3545	Design	B	DE Brng	6312 C3
Nom.Eff.	FL	93.0%	3/4	93.4%		ODE Brng	6311 C3
						Grease type: SKF LGHP 2	
50Hz 50 HP 200/400 V 131/65.4 A 2945 rpm							