

DATA SHEET

Premium Efficiency Motor: **PEWWE30-36-286JM**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 16-Feb-2023

Document ID:

Customer:

MOTOR INFORMATION

HP	30
RPM	3600
Phase	3
Frequency	60 Hz
Voltage	230/460 V
Frame Size	286JM
Enclosure	TEFC
Degree of Protection	IP55
Service Factor	1.25
Poles	2
Full Load Speed	3550
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	G
Duty Cycle	S1 / Continuous
Slip	1.40%
NEMA Design	B
Moment of Inertia	1.61 lb.ft.^2
Locked Rotor Time (Hot)	18 seconds
Sound Pressure Level	75 dB(A)
Number of Starts	2 Cold/1 Hot
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bi-Directional
Area of Classification	Class I, Division 2, Groups A, B, C, D
Inverter Rating	10:1 CT / 20:1 VT PWM Type
Standard	NEMA MG-1
Approvals	CSA-US, CE

EFFICIENCY/POWER FACTOR

LOAD	EFF	P. F.
100%	91.7 %	0.88
75%	92.4 %	0.86
50%	92.1 %	0.8

TORQUE

FULL LOAD	LRT	BDT
44.4 lb.ft.	150 %	230 %

AMPERAGE INFORMATION

	230V	460V
Full Load Amps	69.6A	34.8A
Locked Rotor Amps	435A	217.5A
No Load Current	21.2A	10.6A
Usable at 208V	77A	

BEARING INFORMATION

DE Bearing	6311 C3
ODE Bearing	6309 C3
Grease Type	SKF LGHP 2
DE Regreasing Interval	2400 Hours
ODE Regreasing Interval	3000 Hours

ADDITIONAL DATA

F2 Suitable	Yes
Shaft Material	1045 Carbon Steel
Connection Diagram	230 / 460 V - 12 Lead Δ
Approximate Weight	372 lbs.


MOTOR DRAWING

Premium Efficiency Motor: **PEWWE30-36-286JM**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

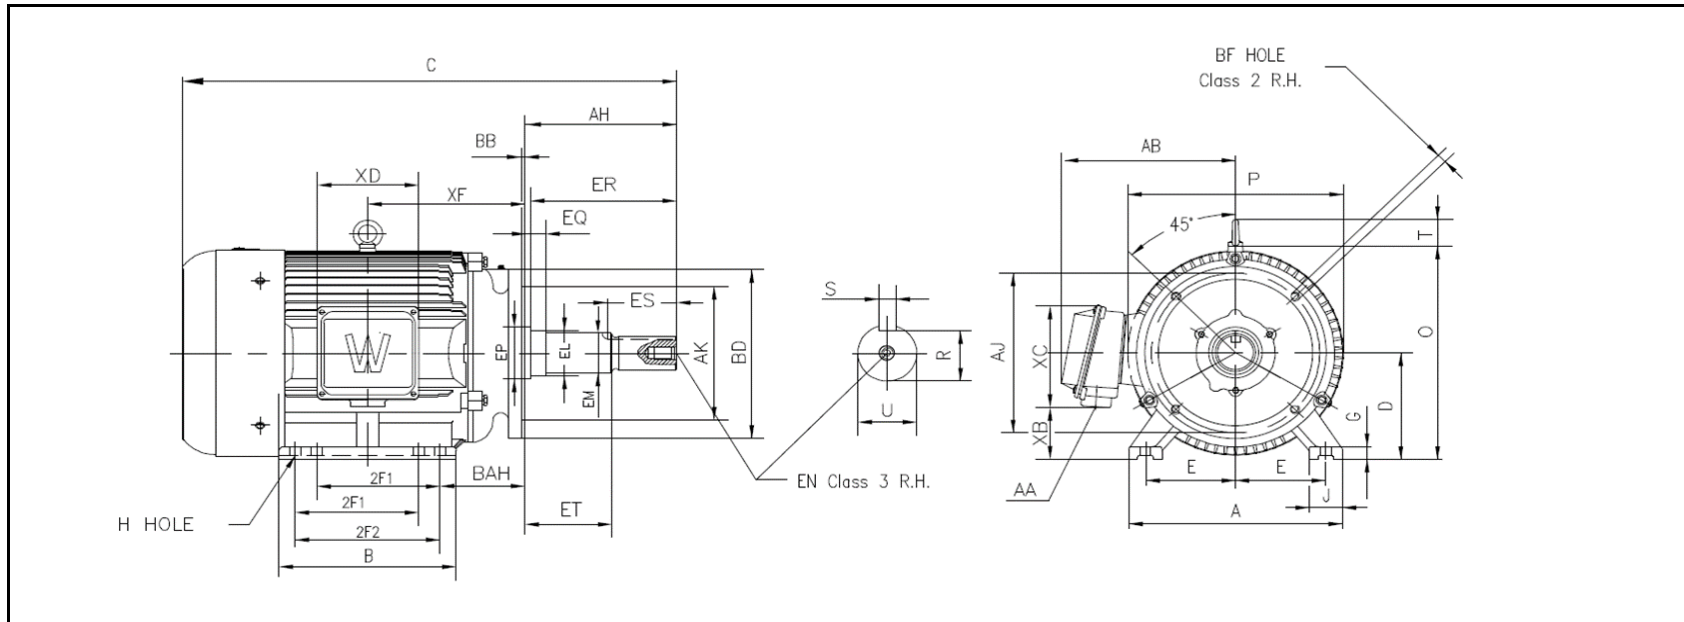

DIMENSION - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F	H	BAH										
5.5	9.5	11	0.53	5	14	13.9	29	7	0.87	2.8	14	14.3	2.05	12

SHAFT & KEY												
S	ES	R	AH	EQ	ET	EM	EL	EP	ER	EN	U	
0.25	2.6	1.11	5.25	0.625	3	1.375	1.75	2.165	5.5	1/2-13	1.249	

FLANGE				
AJ	AK	BB	BD	BF
11	12.5	0.275	13.2	5/8-11

TERMINAL BOX				
AA	XB	XC	XD	XF
1.5	3.6	7.4	6.3	10.5

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:

PEWWE30-36-286JM


Document Generated: 16-Feb-2023

Document ID:


Customer:

Motor Type	PEWWE		FL Speed	3550		
Output Rating (HP)	30		LRT (%FLT)	150	460 volt FLA	34.8
Full Load Torque	44.4	lb.ft	BDT (%FLT)	230	230 volt FLA	69.6
Rotor Wk^2	1.61	lb-ft^2				

SPEED VS TORQUE & CURRENT CURVE

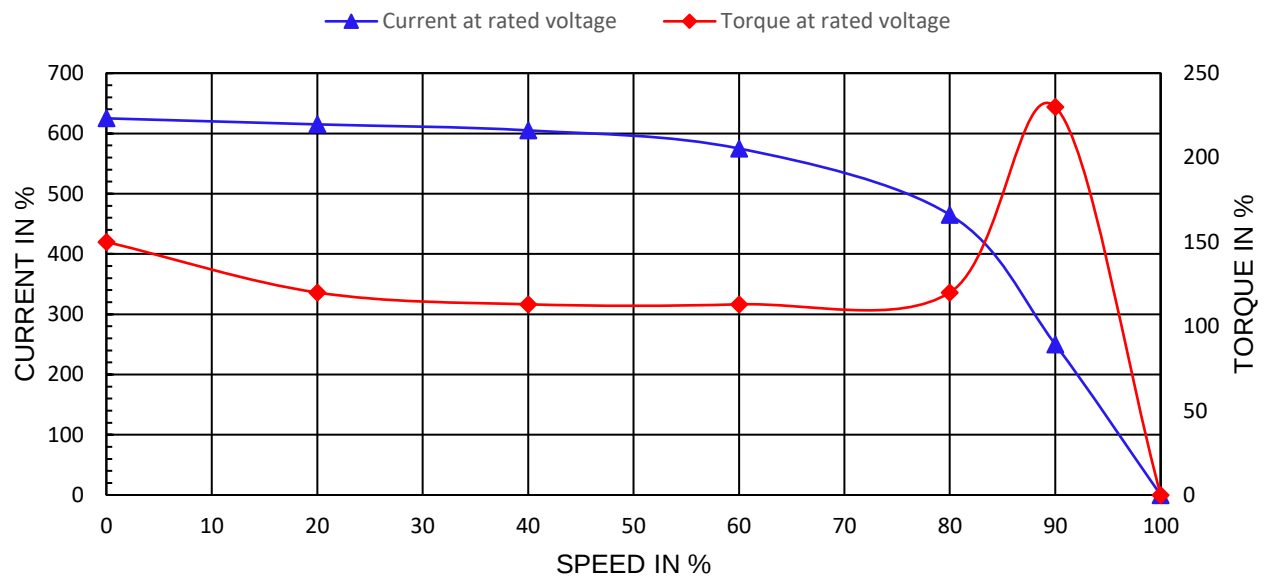

OUTPUT VS EFF., P.F. & CURRENT CURVE

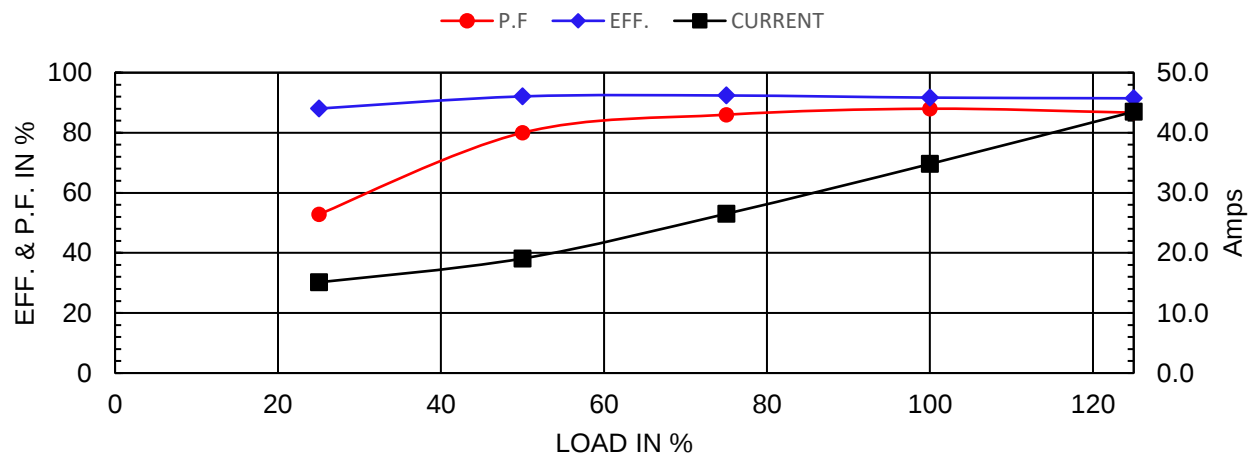

NAMEPLATE / WIRING

Premium Efficiency Motor:

PEWWE30-36-286JM

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 16-Feb-2023
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		NEMA Premium		3-PHASE INDUCTION MOTOR		259277 		CE CC006A																
Model				Ser No.				Low Voltage																
HP		S.F.		IP		Encl		<table border="1"> <tr><td>6</td><td>4</td><td>5</td></tr> <tr><td>7</td><td>8</td><td>9</td></tr> <tr><td>12</td><td>10</td><td>11</td></tr> <tr><td>1</td><td>2</td><td>3</td></tr> <tr><td>L1</td><td>L2</td><td>L3</td></tr> </table>		6	4	5	7	8	9	12	10	11	1	2	3	L1	L2	L3
6	4	5																						
7	8	9																						
12	10	11																						
1	2	3																						
L1	L2	L3																						
Frame		P.F.		Code		Type		<table border="1"> <tr><td>4</td><td>5</td><td>6</td></tr> <tr><td>7</td><td>8</td><td>9</td></tr> <tr><td>12</td><td>10</td><td>11</td></tr> <tr><td>1</td><td>2</td><td>3</td></tr> <tr><td>L1</td><td>L2</td><td>L3</td></tr> </table>		4	5	6	7	8	9	12	10	11	1	2	3	L1	L2	L3
4	5	6																						
7	8	9																						
12	10	11																						
1	2	3																						
L1	L2	L3																						
Voltage	230/460	Hz		Ins Cl		Rating	°C Amb Cont																	
Amps		RPM		Design		Date																		
Nom.Eff.	FL	% 3/4	%	230/460V	10:1 CT 20:1 VT PWM VFD 1.0SF																			
				DE Brng																				
Class I DIV. 2 Groups A B C D				Amb.40°C		T3C(160°C)		ODE Brng																
Class I Zone 2 II C				Amb.55°C		T3A(180°C)		Grease type: LGHP 2 (compatible with polyrex)																
50Hz		HP	V	A	rpm	S.F.1.0																		
WorldWide Electric Corporation																								

Model	PEWWE30-36-286JM						
HP	30	S.F.	1.25	IP	IP55	Encl	TEFC
Frame	286JM	P.F.	0.88	Code	G	Type	
Voltage	230/460 V	Hz	60 Hz	Ins Cl	F	Ambient	40°C
Amps	69.6/34.8	RPM	3550	Design	B	DE Brng	6311 C3
Nom.Eff.	FL	91.7%	3/4	92.4%		ODE Brng	6309 C3
						Grease type:	SKF LGHP 2
50Hz		30 HP	200/400 V	80.4/40.2 A	2945 rpm		