

DATA SHEET

Premium Efficiency Motor: **OW30-9-364T,**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 6-Apr-2023

Document ID:

Customer:

MOTOR INFORMATION

HP	30
RPM	900
Phase	3
Frequency	60 Hz
Voltage	230/460/796
Frame Size	364T
Enclosure	TEFC
Degree of Protection	IP55
Service Factor	1.15
Poles	8
Full Load Speed	854
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	G
Duty Cycle	S1 / Continuous
Slip	5.08%
NEMA Design	D
Moment of Inertia	15.202 lb.ft.^2
Locked Rotor Time (Hot)	12 seconds
Sound Pressure Level	86 dB(A)
Number of Starts	2 Cold/1 Hot
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F2
Rotation	Bi-Directional
Standard	NEMA MG-1
Approvals	UL, CE, IEEE45

EFFICIENCY/POWER FACTOR

LOAD	EFF	P. F.
100%	91.1 %	0.77
75%	91.5 %	0.73
50%	90.6 %	0.62

TORQUE

FULL LOAD	LRT	BDT	PUT
181.5 lb.ft.	276 %	200 %	253 %

AMPERAGE INFORMATION

	230V	460V	796V
Full Load Amps	78.40	39.20	22.60
Locked Rotor Amps	442.00	221.00	127.60
No Load Current	32.80	16.40	9.47

BEARING INFORMATION

DE Bearing	6314 C3
ODE Bearing	6212 C3
Grease Type	Mobil Polyrex EM
DE Regreasing Interval	2400 Hours
ODE Regreasing Interval	2400 Hours
Grease Quantity	26g/12g


ADDITIONAL DATA

F2 Suitable	YES
Shaft Material	1045 Carbon Steel
Connection Diagram	230 / 460 V - 12 Lead Δ
Approximate Weight	800.2 lbs.
Area of Classification	Class 1 Division 2 Groups A,B,C,D T3B in accordance with NEC

MOTOR DRAWING

Premium Efficiency Motor: **OW30-9-364T**

WorldWide Electric Corporation
1 (800) 808-2131
Worldwideelectric.net

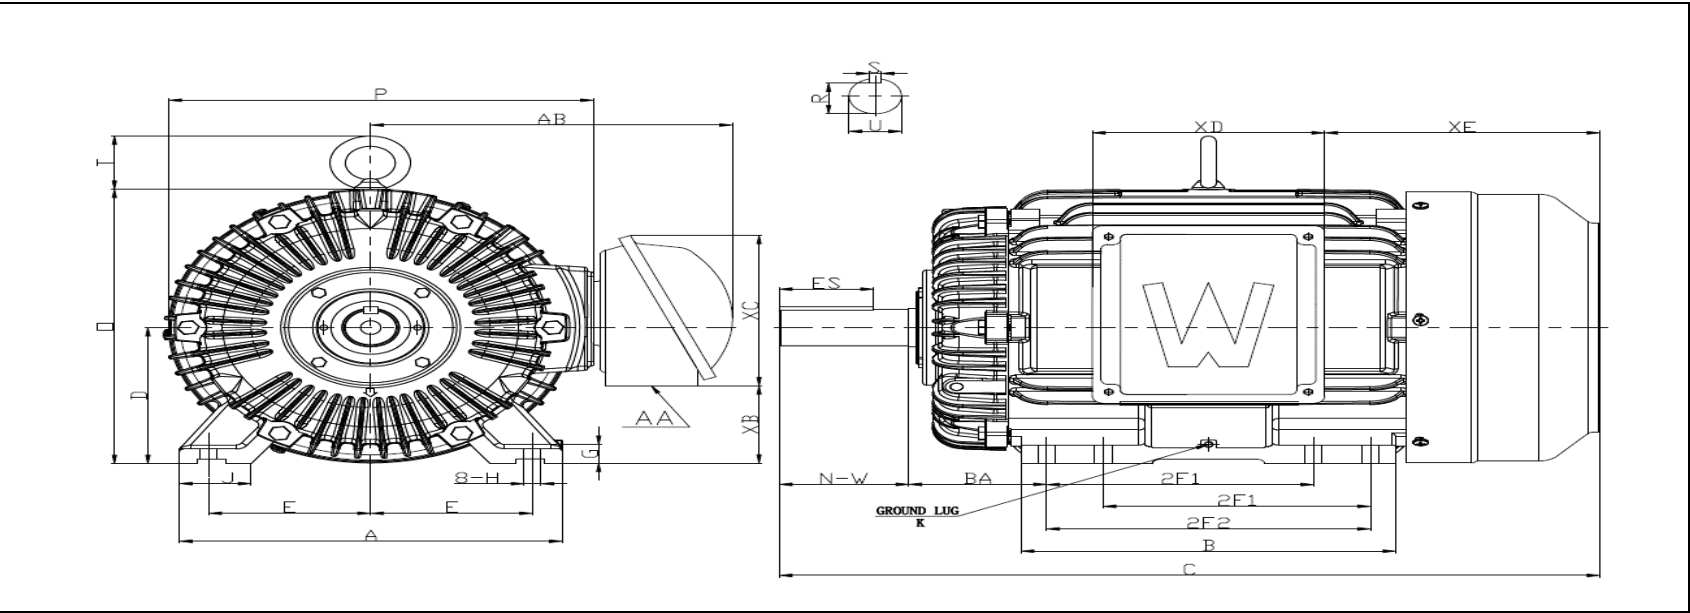

DIMENSION - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F2	H	BA										
7	11.25	12.25	0.66	5.88	16.93	15.4	33.52	9	1.181	3.543	16.54	19.11	2.81	15.55

SHAFT & KEY					
S	ES	R	N-W	AH	U
0.625	4.28	2.021	5.88	N/A	2.375

TERMINAL BOX				
AA	XB	XC	XD	XE
3	4.29	11.27	9.17	12.4

GROUND LUG
K
M8

PERFORMANCE CURVES

Premium Efficiency Motor:

OW30-9-364T

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net





Document Generated: 6-Apr-2023

Document ID:

Customer:

Motor Type	PEWWE		FL Speed	854.3	
Output Rating (HP)	30		LRT (%FLT)	276	
Full Load Torque	181.5	lb.ft	460 volt FLA	39.20	
Rotor Wk^2	15.202	lb-ft^2	230 volt FLA	78.40	
			BDT (%FLT)	200	

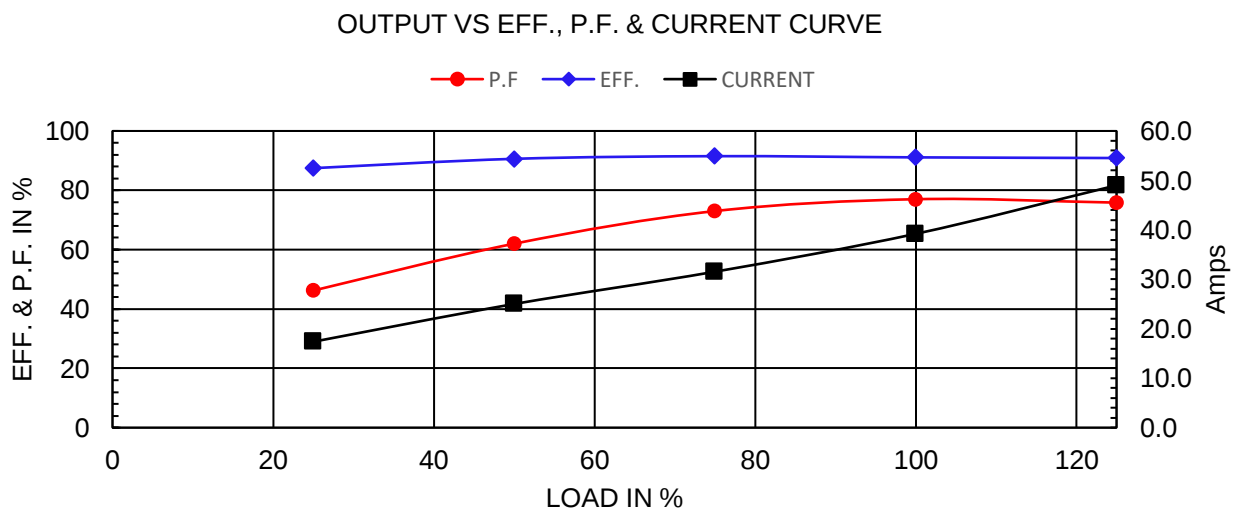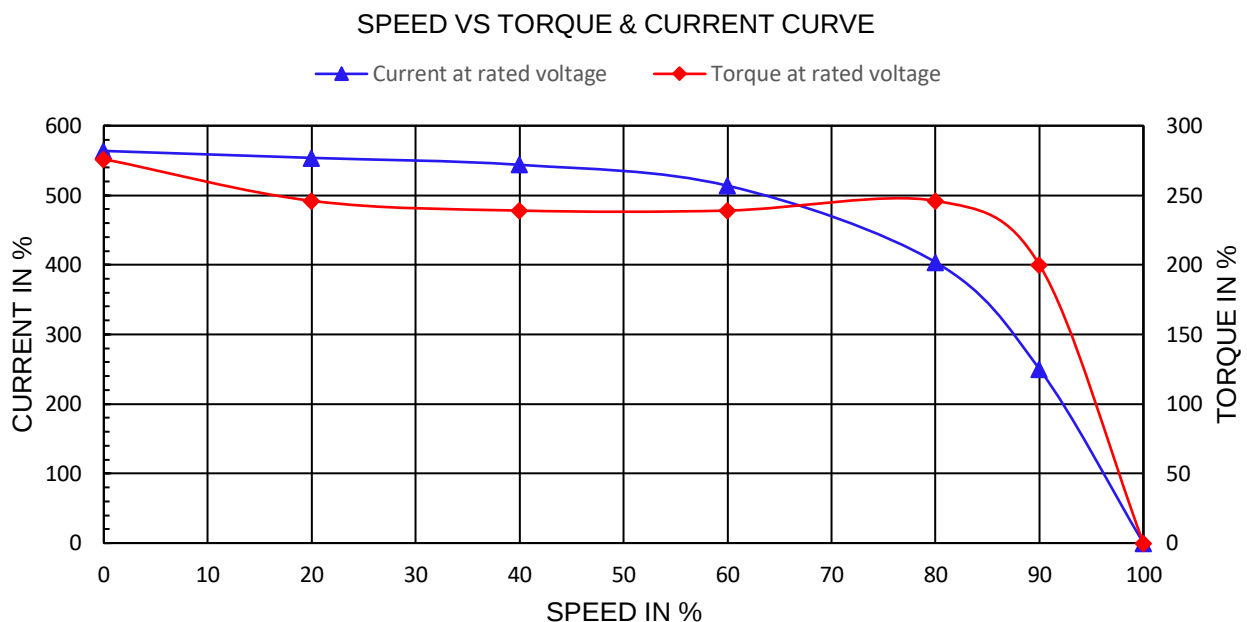

NAMEPLATE / WIRING

Premium Efficiency Motor: **OW30-9-364T**

WorldWide Electric Corporation

1 (800) 808-2131


Worldwideelectric.net



Document Generated: 6-Apr-2023
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

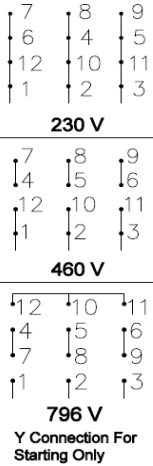 OIL WELL PUMPING 3 PHASE INDUSTRIAL ELECTRIC MOTOR  						 230 V 460 V 796 V Y Connection For Starting Only	Made in China
Model :		SN :		Code :			
HP :	RPM :	IP 55	FR :	Endl : TEFC			
Hz :	60	50	Ins : F	Eff :			
Volts :	230/460/796	200/400/693	Design : D	P.F. :			
Amps :			WT :	DE BRG :			
SF :	1.15	1.0	Duty : Cont	ODE BRG :			
Max Amb 40°C-CONT			LRT/FLT : %	Date :			
 WorldWide Electric Corporation							

Model	OW30-9-364T				
HP	30	RPM	854.3	IP	IP55
Hz	60 Hz	Hz	50Hz	Frame	364T
Voltage	230/460/796	Volts	200/400/693	Encl	TEFC
230V FLA	78.40	200V FLA	94.00	Ins Cl	F
460V FLA	39.20	400V FLA	47.00	Design	D
796V FLA	22.60	693V FLA	47.00	Code	G
S.F.	1.15	S.F.	1.00	WT	800.2 lbs.
Max. Amb.	40°C			Duty	S1 / Continuous
LRT/FLT	276%			Nom.Eff.	91.1%
				P.F.	0.77
				DE Brng	6314 C3
				ODE Brng	6212 C3