

DATA SHEET

Premium Efficiency Motor: **PEWWE15-36-215JP**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 16-Feb-2023

Document ID:

Customer:

MOTOR INFORMATION

HP	15
RPM	3600
Phase	3
Frequency	60 Hz
Voltage	230/460 V
Frame Size	215JP
Enclosure	TEFC
Degree of Protection	IP55
Service Factor	1.15
Poles	2
Full Load Speed	3505
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	G
Duty Cycle	S1 / Continuous
Slip	2.64%
NEMA Design	B
Moment of Inertia	0.369 lb.ft. ²
Locked Rotor Time (Hot)	8 seconds
Sound Pressure Level	69 dB(A)
Number of Starts	2 Cold/1 Hot
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bi-Directional
Area of Classification	Class I, Division 2, Groups A, B, C, D
Inverter Rating	10:1 CT / 20:1 VT PWM Type
Standard	NEMA MG-1
Approvals	CSA-US, CE

EFFICIENCY/POWER FACTOR

LOAD	EFF	P. F.
100%	91.0 %	0.89
75%	91.8 %	0.86
50%	91.7 %	0.78

TORQUE

FULL LOAD	LRT	BDT
22.5 lb.ft.	160 %	240 %

AMPERAGE INFORMATION

	230V	460V
Full Load Amps	34.7A	17.3A
Locked Rotor Amps	232A	116A
No Load Current	10.6A	5.3A
Usable at 208V	38.4A	

BEARING INFORMATION

DE Bearing	6309ZZ C3
ODE Bearing	6207ZZ C3
Grease Type	SKF LGHP 2
DE Regreasing Interval	- Hours
ODE Regreasing Interval	- Hours

ADDITIONAL DATA

F2 Suitable	No
Shaft Material	1045 Carbon Steel
Connection Diagram	230 / 460 V - 9 Lead Δ
Approximate Weight	190 lbs.


MOTOR DRAWING

Premium Efficiency Motor: **PEWWE15-36-215JP**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

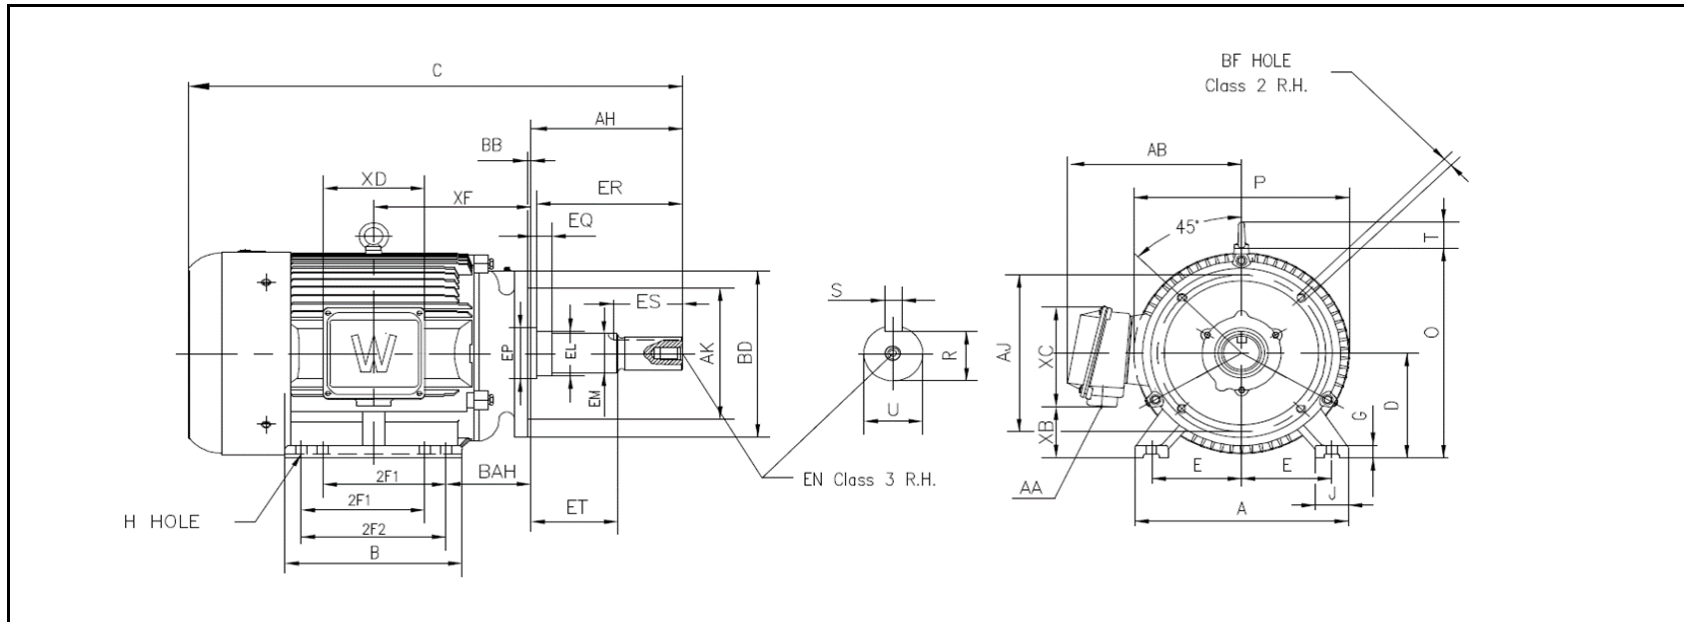

DIMENSION - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F	H	BAH										
4.25	5.5	7	0.41	4.5	10.5	9	25.5	5.25	0.71	2.4	10.4	10.6	1.73	8.5

SHAFT & KEY												
S	ES	R	AH	EQ	ET	EM	EL	EP	ER	EN	U	
0.25	2.6	1.11	8.125	2.375	5.875	1.375	1.75	1.772	8.37	1/2-13	1.249	

FLANGE				
AJ	AK	BB	BD	BF
7.25	8.5	0.275	8.9	1/2-13

TERMINAL BOX				
AA	XB	XC	XD	XF
1	3.3	5.1	4.6	8

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:

PEWWE15-36-215JP


Document Generated: 16-Feb-2023

Document ID:


Customer:

Motor Type	PEWWE			FL Speed	3505		
Output Rating (HP)	15			LRT (%FLT)	160	460 volt FLA	17.3
Full Load Torque	22.5	lb.ft		BDT (%FLT)	240	230 volt FLA	34.7
Rotor Wk^2	0.369	lb-ft^2					

SPEED VS TORQUE & CURRENT CURVE

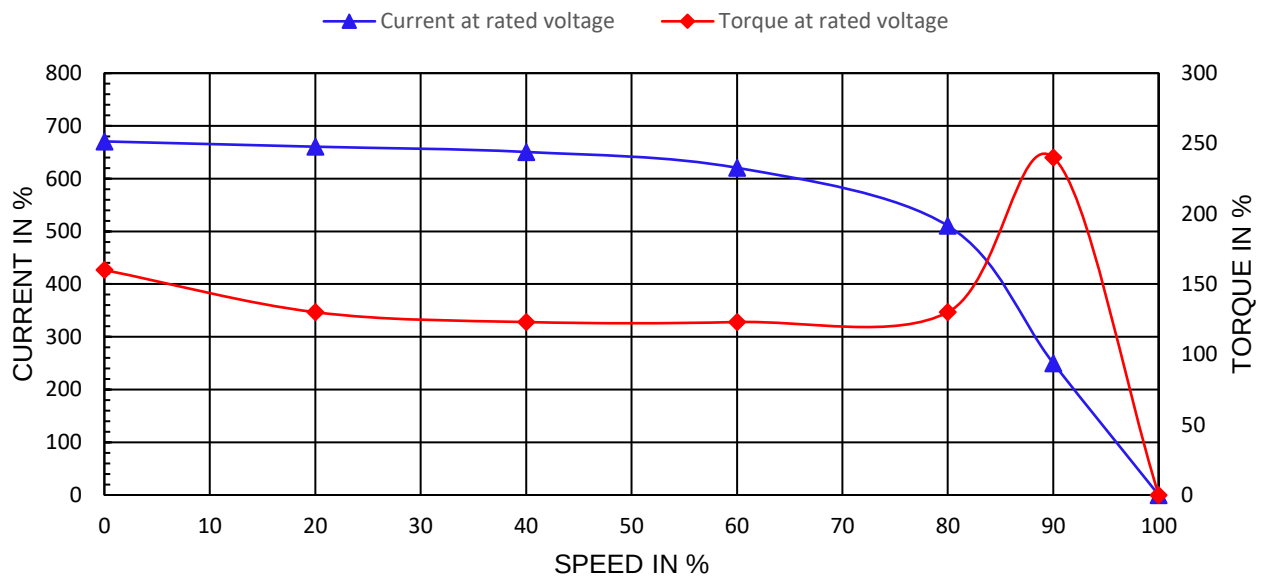

OUTPUT VS EFF., P.F. & CURRENT CURVE

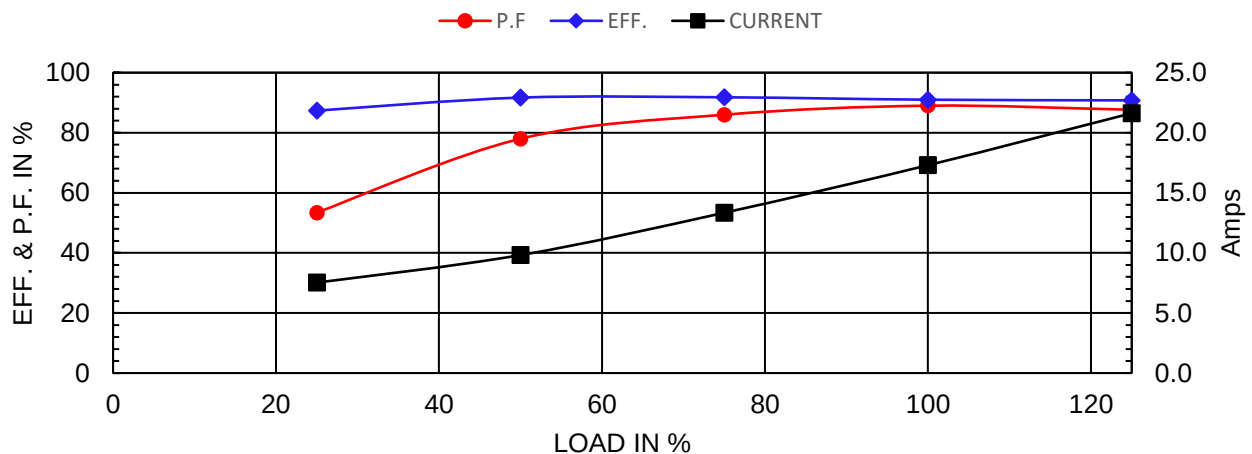

NAMEPLATE / WIRING

Premium Efficiency Motor:

PEWWE15-36-215JP

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 16-Feb-2023
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		NEMA Premium		3-PHASE INDUCTION MOTOR		259277 	CE CC006A
Model				Ser No.			
HP		S.F.		IP		Encl	
Frame		P.F.		Code		Type	
Voltage	230/460	Hz		Ins Cl		Rating	°C Amb Cont
Amps		RPM		Design		Date	
Nom.Eff.	FL	% 3/4	%	230/460V	10:1 CT 20:1 VT PWM VFD	1.0SF	
				DE Brng ODE Brng Grease type:			
Class I DIV. 2 Groups A B C D		Amb.40°C T3C(160°C)					
Class I Zone 2 IIC		Amb.55°C T3A(180°C)					
50Hz	HP	V	A	rpm	S.F.1.0		
WorldWide Electric Corporation							

Model	PEWWE15-36-215JP						
HP	15	S.F.	1.15	IP	IP55	Encl	TEFC
Frame	215JP	P.F.	0.89	Code	G	Type	
Voltage	230/460 V	Hz	60 Hz	Ins Cl	F	Ambient	40°C
Amps	34.7/17.3	RPM	3505	Design	B	DE Brng	6309ZZ C3
Nom.Eff.	FL	91.0%	3/4	91.8%		ODE Brng	6207ZZ C3
						Grease type:	SKF LGHP 2
50Hz	--	HP	--	--	A	--	rpm