

DATA SHEET

Premium Efficiency Motor: **NATE3-36-56CRD**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 24-Feb-2023

Document ID:

Customer:

MOTOR INFORMATION

HP	3
RPM	3600
Phase	3
Frequency	60 Hz
Voltage	230/460
Frame Size	56HC
Enclosure	TEFC
Degree of Protection	IP43
Service Factor	1.15
Poles	2
Full Load Speed	3500
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	J
Duty Cycle	S1 / Continuous
Slip	0.03%
NEMA Design	B
Moment of Inertia	0.0691 lb.ft.^2
Sound Pressure Level	73 dB(A)
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Base	C-Face Footless
Rotation	Bi-Directional
Standard	NEMA MG-1
Approvals	CSA, CE

EFFICIENCY/POWER FACTOR

LOAD	EFF	P. F.
100%	88.1 %	84.6
75%	88.3 %	78.5
50%	86.5 %	66.9

TORQUE

FULL LOAD	LRT	BDT
4.5 lb.ft.	430 %	450 %

AMPERAGE INFORMATION

	230V	460V
Full Load Amps	8.01	3.69
Locked Rotor Amps	89.1	44.55
No Load Current	3.54	1.77
Usable at 208V	7	

BEARING INFORMATION

DE Bearing	6203 2RS
ODE Bearing	6203 2RS

ADDITIONAL DATA

F2 Suitable	No
Shaft Material	1045 Carbon Steel
Connection Diagram	230 / 460 V - 9 Lead Y
Approximate Weight	38.8 lbs.


MOTOR DRAWING

Premium Efficiency Motor: **NATE3-36-56CRD**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

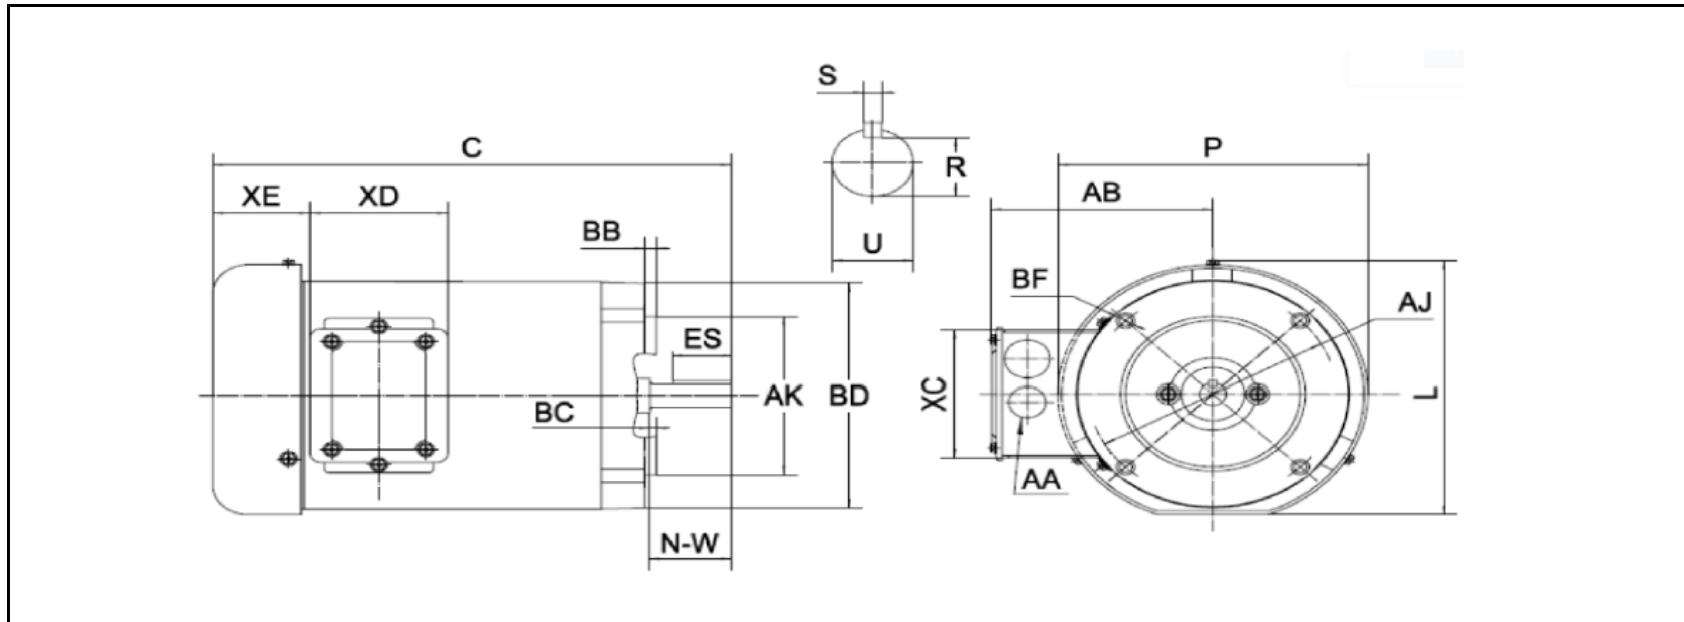

DIMENSION - INCHES

FLANGE MOUNTING						C	P	L	AB
AK	Max BD	AJ	BF	BB	BC				
4.5	5	5.875	3/8-16	0.16	-0.19	12.9	7.3	7.4	5.2

SHAFT & KEY				
S	ES	R	N-W	U
0.188	1.41	0.517	1.88	0.625

TERMINAL BOX				
AA	XB	XC	XD	XE
3-0.88/2-1.109	1.65	3.7	3.2	2.15

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:

NATE3-36-56CRD


Document Generated: 24-Feb-2023

Document ID:


Customer:

Motor Type					
Output Rating (HP)	3		FL Speed	3500	
Full Load Torque	4.5 lb.ft		LRT (%FLT)	430	460 volt FLA 3.69
Rotor Wk^2	0.0691 lb-ft^2		BDT (%FLT)	450	230 volt FLA 8.01

SPEED VS TORQUE & CURRENT CURVE

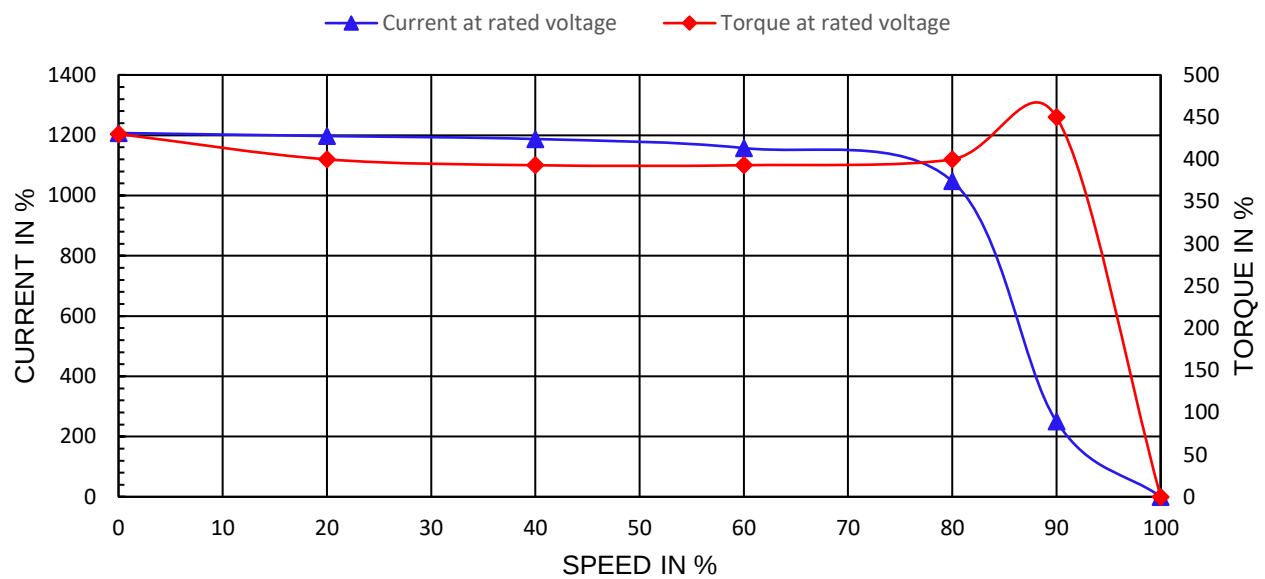

OUTPUT VS EFF., P.F. & CURRENT CURVE

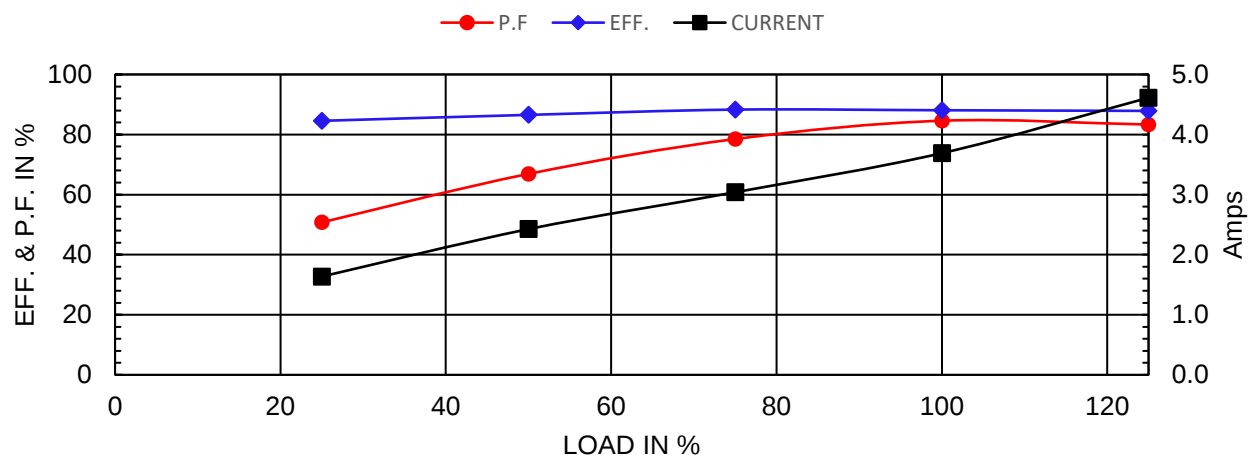

NAMEPLATE / WIRING

Premium Efficiency Motor: **NATE3-36-56CRD**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 24-Feb-2023
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		THREE PHASE INDUCTION MOTOR				
MODEL		FRAME		LOW VOLTAGE		HIGH VOLTAGE
Hz		ENCL. TEFC		BLUE (T1) — LINE1		BLUE (T1) — LINE1
HP		PH 3		BROWN (T7) — LINE1		WHITE (T2) — LINE2
RPM		DUTY CONT		WHITE (T2) — LINE2		ORANGE (T3) — LINE3
VOLTS		CODE		RED (T8) — LINE2		YELLOW (T4) — INS
AMPS		INS. F		ORANGE (T3) — LINE3		BROWN (T7) — INS
S. F.		DES.		YEL/BLA (T9) — LINE3		BLACK (T5) — INS
NOM. EFF (60Hz)		DE/ODE BRG.		YELLOW (T4) — INS		RED (T8) — INS
MAX. AMB. 40°C		Date Code XX/XXXX		BLACK (T5) — INS		GRAY (T6) — INS
SERIAL NO. XXXXXXXXXX		WorldWide Electric Corporation		GRAY (T6) — INS		YEL/BLA (T9) — INS
				ACCEPTABLE FOR FIELD WIRING		MADE IN CHINA
				THERMALLY PROTECTED : NONE		

Model	NATE3-36-56CRD	Frame	56HC
Hz	60 Hz 50Hz	Encl	TEFC
HP	3 2	PH	3
RPM	3500 2915	DUTY	CONT
Voltage	230/460 190/380	Code	J
Amps	8.01/3.69 6.32/3.16	Ins Cl	F
IP	IP43	Design	B
S.F.	1.15 1.15	LB/WT	38.8 lbs.
Nom.Eff.	88.1%	DE Brng	6203 2RS
		ODE Brng	6203 2RS