



WORLDWIDE ELECTRIC MOTOR DATA SHEET

ODP75-18-365T




HORSEPOWER	75		
RPM / POLES	1800 / 4		
VOLTAGE / PHASE	208 - 230 / 460 V / 3		
FRAME	365T		
ENCLOSURE / DEGREE OF PROTECTION	ODP / IP23		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	1783 RPM		
SERVICE FACTOR	1.15 SF 60HZ / 1.0 SF at 50HZ		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	172.6 / 86.3 A		
LOCKED ROTOR AMPS (STARTING); 230 / 460	1092.8 / 546.4 A		
NO LOAD CURRENT	59.8 / 29.9 A		
NEMA CODE LETTER	G		
EFFICIENCY / POWER FACTOR	LOAD	EFF.	P.F.
	100%	95.0%	0.84
	75%	95.4%	0.81
	50%	94.9%	0.74
DUTY CYCLE	S1 / Continuous		
TORQUE	FULL LOAD	LRT	BDT
	217.1 lb.ft.	207%	276%
SLIP	0.9575		
NEMA DESIGN	B		
NUMBER OF STARTS (Hot / Cold)	2 Hot / 3 Cold		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6314		
ODE BEARING	6214		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1 / F2 Suitable		
ROTATION	Bi-Directional		
APPROXIMATE WEIGHT	744 lbs.		
AREA CLASSIFICATION	Non-Hazardous		
INVERTER RATING	10:1 CT / 20:1 VT PWM Type		
SPECIFICATION - In Accordance With	NEMA, UR		



WORLDWIDE ELECTRIC MOTOR DRAWING

ODP-365T

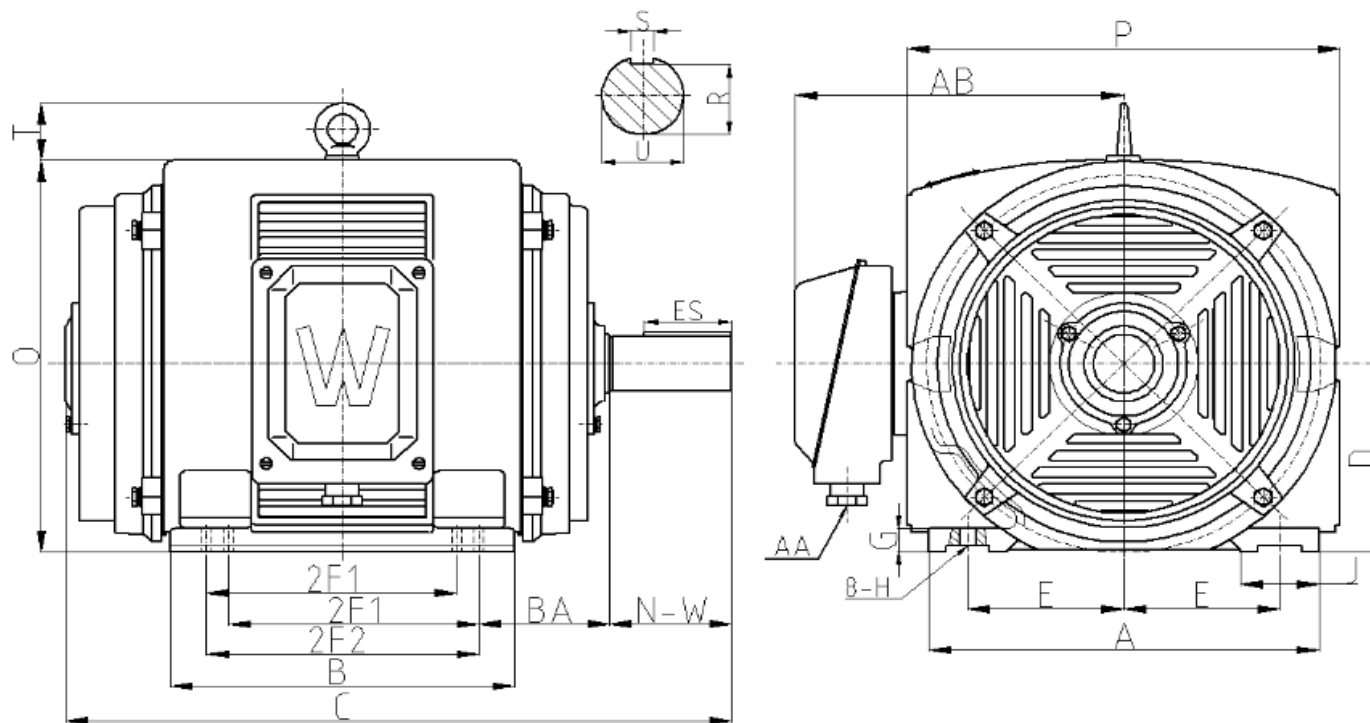

ALL DIMENSIONS IN INCHES

MOUNTING					A	B	C	D	G
E	2F1	2F2	H	BA					
7	11.25	12.25	0.66	5.88	17.6	15.5	30.9	9	1.1

KEYSET	KEY		U	N-W	P	AB	AA	O	J	T
R	ES	S								
2.021	4.28	0.625	2.375	5.88	19.5	14.8	3	18.5	3.543	2.7

REVISED - 09/24/2019