

DATA SHEET

Premium Efficiency Motor: **PEWWE5-12-215TC**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 16-Feb-2023

Document ID:

Customer:

MOTOR INFORMATION

HP	5
RPM	1200
Phase	3
Frequency	60 Hz
Voltage	230/460 V
Frame Size	215TC
Enclosure	TEFC
Degree of Protection	IP55
Service Factor	1.25
Poles	6
Full Load Speed	1175
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	J
Duty Cycle	S1 / Continuous
Slip	2.08%
NEMA Design	B
Moment of Inertia	0.799 lb.ft. ²
Locked Rotor Time (Hot)	15 seconds
Sound Pressure Level	64 dB(A)
Number of Starts	2 Cold/ 1 Hot
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bi-Directional
Area of Classification	Class I, Division 2, Groups A, B, C, D
Inverter Rating	10:1 CT / 20:1 VT PWM Type
Standard	NEMA MG-1
Approvals	CSA-US, CE

EFFICIENCY/POWER FACTOR

LOAD	EFF	P. F.
100%	89.5 %	0.72
75%	89.6 %	0.67
50%	89.3 %	0.55

TORQUE

FULL LOAD	LRT	BDT
22.3 lb.ft.	155 %	250 %

AMPERAGE INFORMATION

	230V	460V
Full Load Amps	14.5A	7.27A
Locked Rotor Amps	92A	46A
No Load Current	7.6A	3.8A
Usable at 208V	16.1A	

BEARING INFORMATION

DE Bearing	6308ZZ C3
ODE Bearing	6207ZZ C3
Grease Type	--
DE Regreasing Interval	- Hours
ODE Regreasing Interval	- Hours

ADDITIONAL DATA

F2 Suitable	Yes
Shaft Material	1045 Carbon Steel
Connection Diagram	230 / 460 V - 9 Lead Y
Approximate Weight	179 lbs.


MOTOR DRAWING

Premium Efficiency Motor: **PEWWE5-12-215TC**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

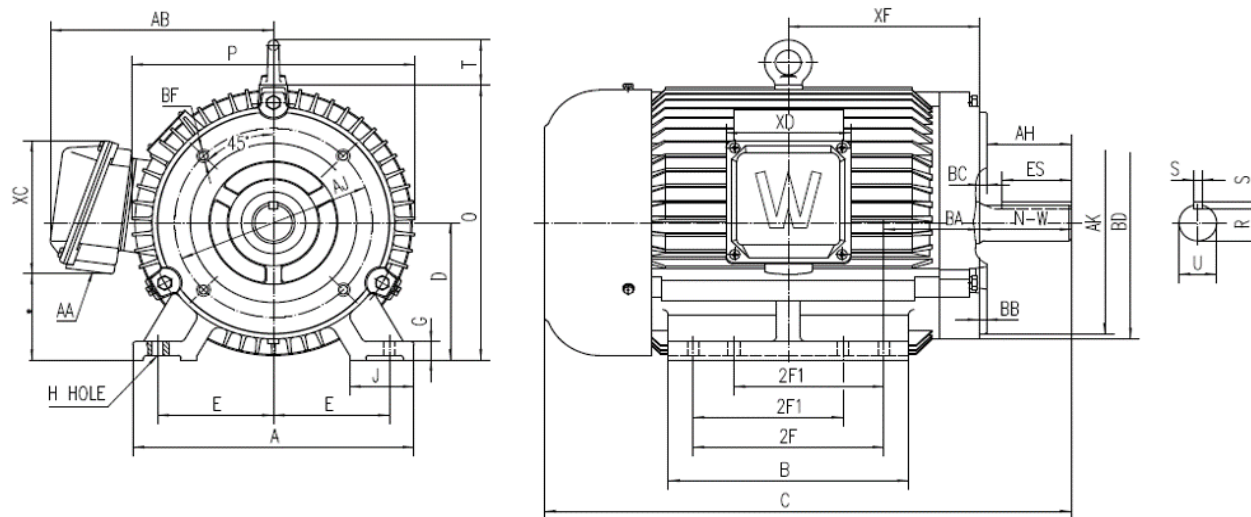

DIMENSION - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F	H	BA										
4.25	5.5	7	0.41	3.5	10.315	8.819	19.319	5.25	0.709	2.362	10.389	10.526	1.732	8.178

SHAFT & KEY					
S	ES	R	N-W	AH	U
0.312	2.41	1.201	3.38	3.12	1.375

TERMINAL BOX				
AA	XB	XC	XD	XF
1	3.296	5.098	4.567	7.002

FLANGE					
AJ	AK	BB	BD	BF	BC
7.25	8.5	0.25	8.898	1/2-13	0.25

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:

PEWWE5-12-215TC


Document Generated: 16-Feb-2023

Document ID:


Customer:

Motor Type	PEWWE			FL Speed	1175		
Output Rating (HP)	5			LRT (%FLT)	155	460 volt FLA	7.27
Full Load Torque	22.3	lb.ft		BDT (%FLT)	250	230 volt FLA	14.5
Rotor Wk^2	0.799	lb-ft^2					

SPEED VS TORQUE & CURRENT CURVE

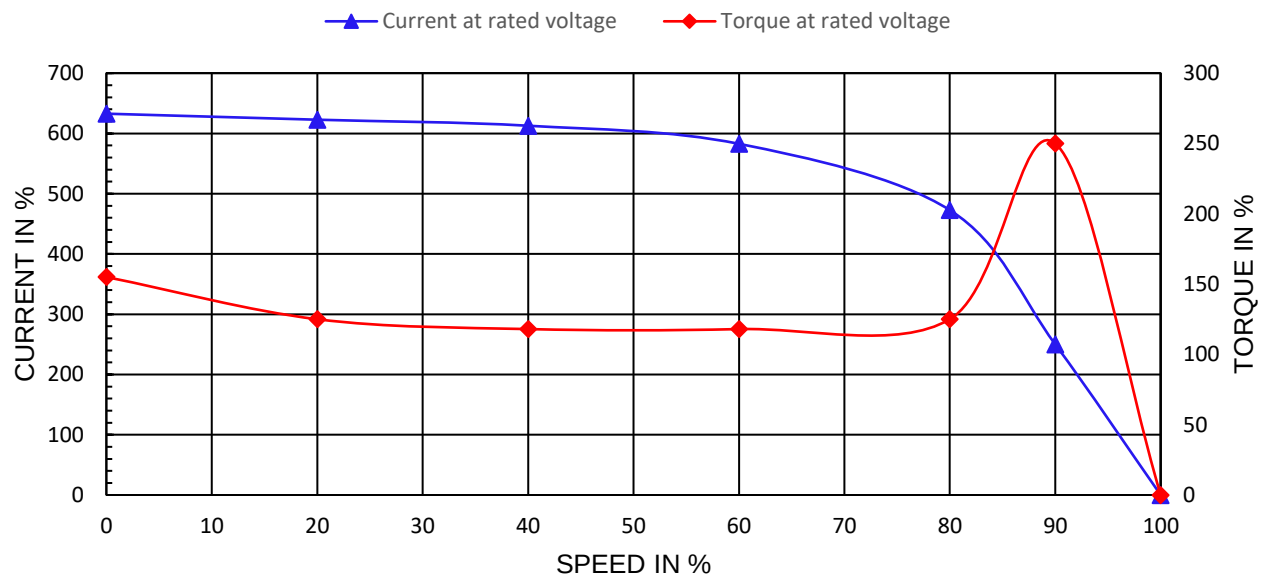

OUTPUT VS EFF., P.F. & CURRENT CURVE

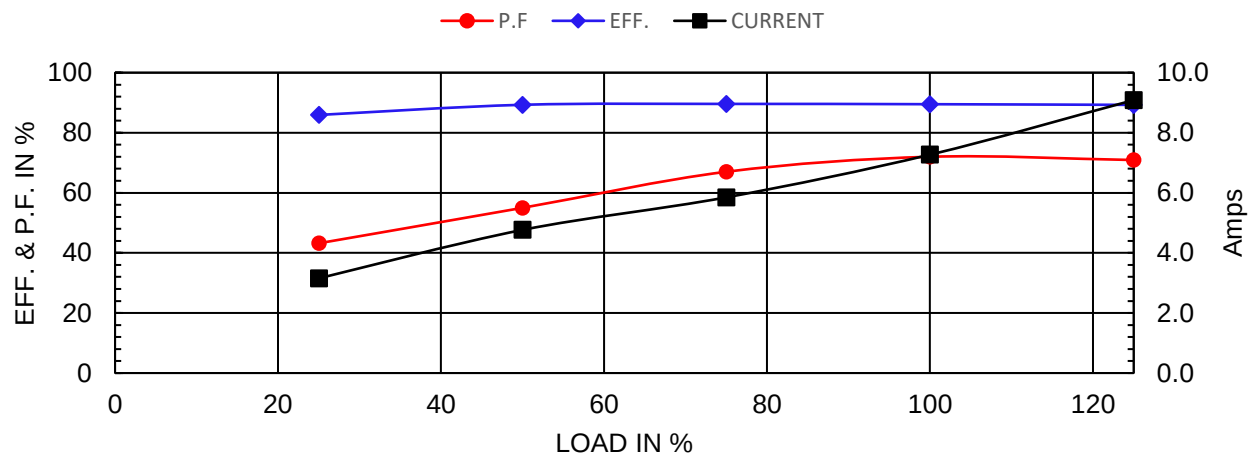

NAMEPLATE / WIRING

Premium Efficiency Motor:

PEWWE5-12-215TC

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 16-Feb-2023
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		NEMA Premium		3-PHASE INDUCTION MOTOR		259277 		CE CC006A	
Model				Ser No.				Low Voltage	
HP		S.F.		IP		Encl		4 5 6 7 8 9 1 2 3 L1 L2 L3	
Frame		P.F.		Code		Type			
Voltage	230/460	Hz		Ins Cl		Rating	°C Amb Cont		
Amps		RPM		Design		Date			
Nom.Eff.	FL	% 3/4	%	230/460V	10:1 CT 20:1 VT PWM VFD	1.0SF			
				DE Brng					
Class I DIV. 2 Groups A B C D				Amb.40°C	T3C(160°C)	ODE Brng			
Class I Zone 2 IIC				Amb.55°C	T3A(180°C)	Grease type:			
50Hz		HP	V	A	rpm	S.F1.0			
WorldWide Electric Corporation									

Model	PEWWE5-12-215TC						
HP	5	S.F.	1.25	IP	IP55	Encl	TEFC
Frame	215TC	P.F.	0.72	Code	J	Type	
Voltage	230/460 V	Hz	60 Hz	Ins Cl	F	Ambient	40°C
Amps	14.5/7.27	RPM	1175	Design	B	DE Brng	6308ZZ C3
Nom.Eff.	FL	89.5%	3/4	89.6%		ODE Brng	6207ZZ C3
						Grease type:	--
50Hz 5 HP 200/400 V 17.7/8.84 A 970 rpm							