

DATA SHEET

Premium Efficiency Motor: **PEWWE50-18-326TC**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 16-Feb-2023

Document ID:

Customer:

MOTOR INFORMATION

HP	50
RPM	1800
Phase	3
Frequency	60Hz
Voltage	230/460 V
Frame Size	326TC
Enclosure	TEFC
Degree of Protection	IP55
Service Factor	1.25
Poles	4
Full Load Speed	1775
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	G
Duty Cycle	S1 / Continuous
Slip	1.40%
NEMA Design	B
Moment of Inertia	6.89 lb.ft.^2
Locked Rotor Time (Hot)	12 seconds
Sound Pressure Level	72 dB(A)
Number of Starts	2 Cold/ 1 Hot
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bi-Directional
Area of Classification	Class I, Division 2, Groups A, B, C, D
Inverter Rating	10:1 CT / 20:1 VT PWM Type
Standard	NEMA MG-1
Approvals	CSA-US, CE

EFFICIENCY/POWER FACTOR

LOAD	EFF	P. F.
100%	94.5 %	0.86
75%	94.9 %	0.82
50%	94.7 %	0.73

TORQUE

FULL LOAD	LRT	BDT
148 lb.ft.	160 %	260 %

AMPERAGE INFORMATION

	230V	460V
Full Load Amps	115A	57.6A
Locked Rotor Amps	725A	362.5A
No Load Current	42A	21A
Usable at 208V	127A	

BEARING INFORMATION

DE Bearing	6312 C3
ODE Bearing	6311 C3
Grease Type	SKF LGHP 2
DE Regreasing Interval	4000 Hours
ODE Regreasing Interval	4000 Hours


ADDITIONAL DATA

F2 Suitable	Yes
Shaft Material	1045 Carbon Steel
Connection Diagram	230 / 460 V - 12 Lead Δ
Approximate Weight	578 lbs.

MOTOR DRAWING

Premium Efficiency Motor: **PEWWE50-18-326TC**

WorldWide Electric Corporation
1 (800) 808-2131
Worldwideelectric.net

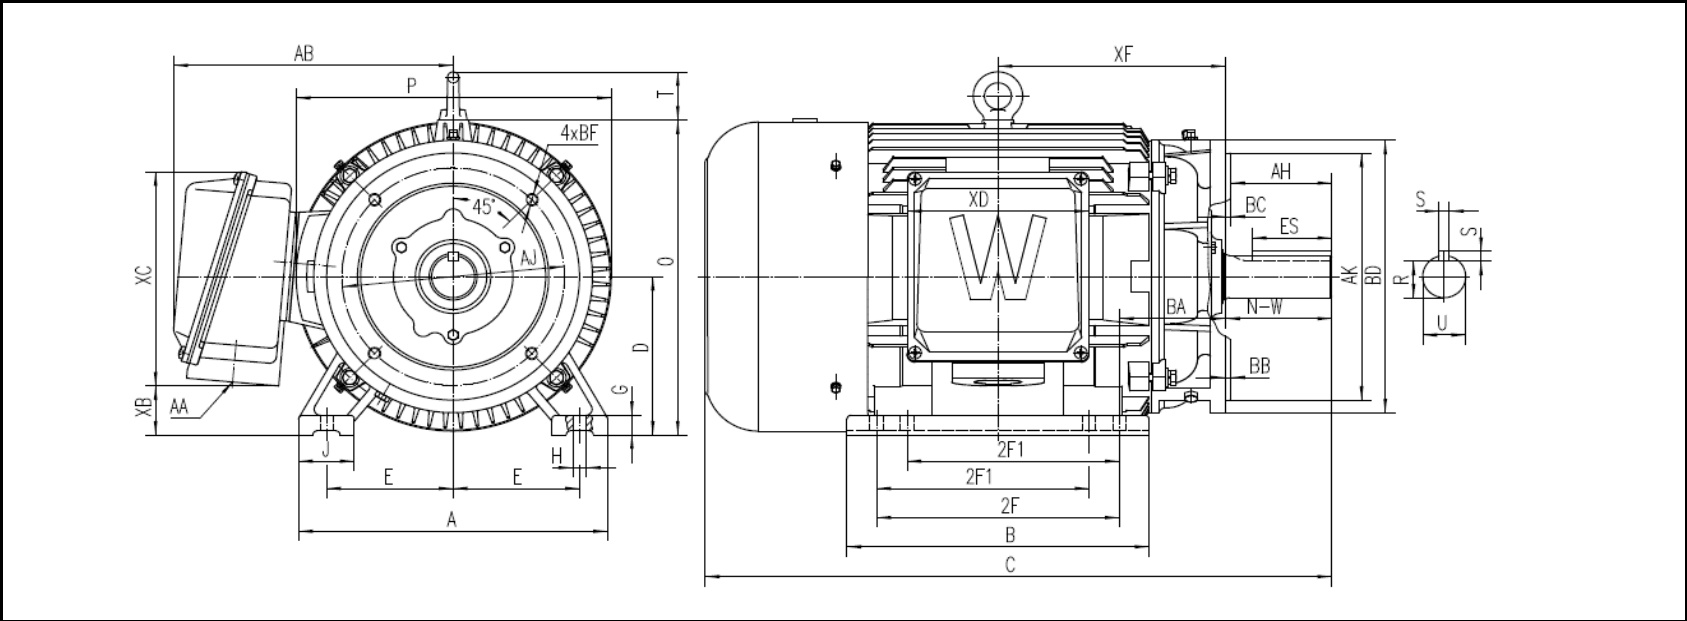

DIMENSION - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F	H	BA										
6.25	10.5	12	0.66	5.25	15.276	14.921	30.967	8	0.984	2.756	15.571	15.913	2.441	13.813

SHAFT & KEY					
S	ES	R	N-W	AH	U
0.5	3.91	1.845	5.25	5	2.125

TERMINAL BOX				
AA	XB	XC	XD	XF
2	2.471	10.826	8.976	11.248

FLANGE					
AJ	AK	BB	BD	BF	BC
11	12.5	0.25	13.78	5/8-11	0.25

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:

PEWWE50-18-326TC


Document Generated: 16-Feb-2023

Document ID:


Customer:

Motor Type	PEWWE			FL Speed	1775		
Output Rating (HP)	50			LRT (%FLT)	160	460 volt FLA	57.6
Full Load Torque	148	lb.ft		BDT (%FLT)	260	230 volt FLA	115
Rotor Wk^2	6.89	lb-ft^2					

SPEED VS TORQUE & CURRENT CURVE

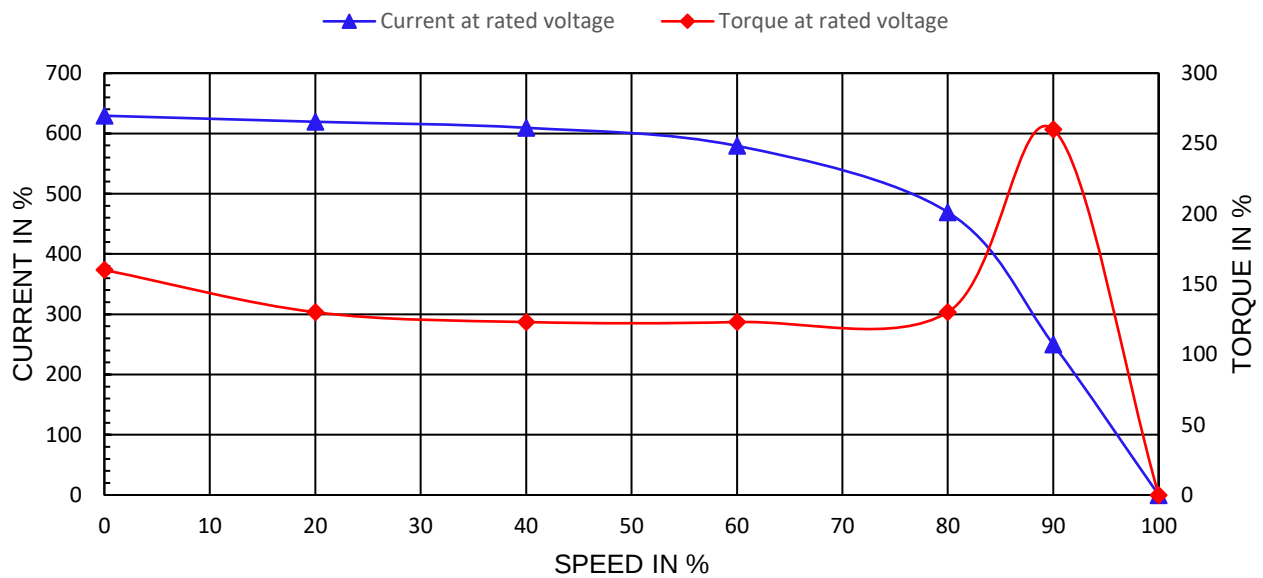

OUTPUT VS EFF., P.F. & CURRENT CURVE

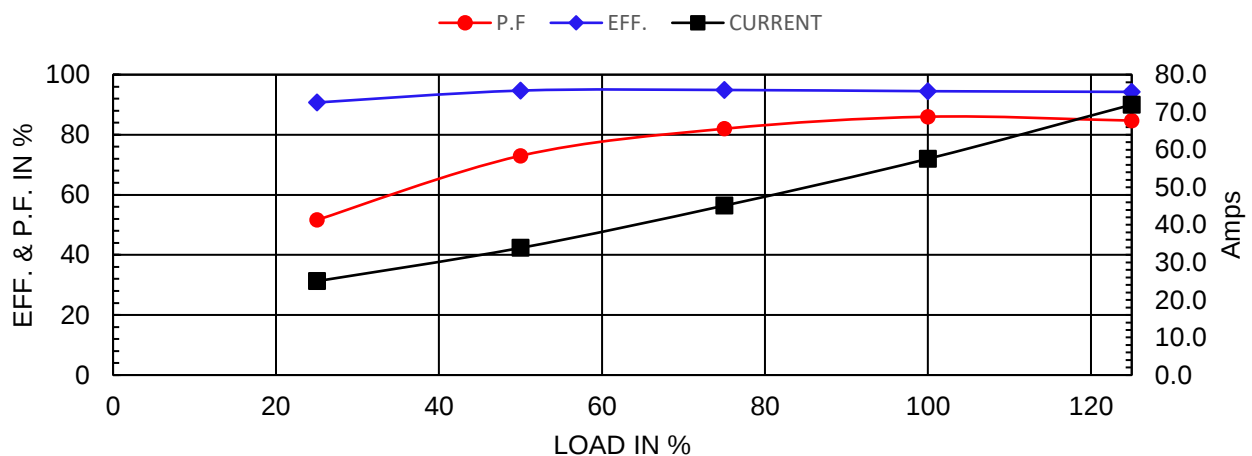

NAMEPLATE / WIRING

Premium Efficiency Motor:

PEWWE50-18-326TC

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 16-Feb-2023
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		NEMA Premium		3-PHASE INDUCTION MOTOR		259277 		CE CC006A	
Model				Ser No.				Low Voltage 6 4 5 7 8 9 12 10 11 1 2 3 L1 L2 L3	
HP		S.F.		IP		Encl			
Frame		P.F.		Code		Type			
Voltage	230/460	Hz		Ins Cl		Rating	°C Amb Cont		
Amps		RPM		Design		Date			
Nom.Eff.	FL	% 3/4		% 230/460 V	10:1 CT	20:1 VT	PWM VFD	1.0SF	
				DE Brng ODE Brng Grease type: LGHP 2 (compatible with polyrex)					
Class I DIV. 2 Groups A B C D		Amb.40°C							
Class I Zone 2 IIC		Amb.55°C							
50Hz		HP		V		A		rpm 1.0SF	
WorldWide Electric Corporation									

Model	PEWWE50-18-326TC						
HP	50	S.F.	1.25	IP	IP55	Encl	TEFC
Frame	326TC	P.F.	0.86	Code	G	Type	
Voltage	230/460 V	Hz	60Hz	Ins Cl	F	Ambient	40°C
Amps	115/57.6	RPM	1775	Design	B	DE Brng	6312 C3
Nom.Eff.	FL	94.5%	3/4	94.9%		ODE Brng	6311 C3
						Grease type:	SKF LGHP 2
50Hz 50 HP 200/400 V 135/67.5 A 1475 rpm							