

DATA SHEET

Premium Efficiency Motor: **PEWWE25-36-256TC**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 16-Feb-2023

Document ID:

Customer:

MOTOR INFORMATION

HP	25
RPM	3600
Phase	3
Frequency	60 Hz
Voltage	230/460 V
Frame Size	256TC
Enclosure	TEFC
Degree of Protection	IP55
Service Factor	1.25
Poles	2
Full Load Speed	3540
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	G
Duty Cycle	S1 / Continuous
Slip	1.25%
NEMA Design	B
Moment of Inertia	1.35 lb.ft.^2
Locked Rotor Time (Hot)	8 seconds
Sound Pressure Level	72 dB(A)
Number of Starts	2 Cold/ 1 Hot
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bi-Directional
Area of Classification	Class I, Division 2, Groups A, B, C, D
Inverter Rating	10:1 CT / 20:1 VT PWM Type
Standard	NEMA MG-1
Approvals	CSA-US, CE

EFFICIENCY/POWER FACTOR

LOAD	EFF	P. F.
100%	91.7 %	0.89
75%	92.1 %	0.87
50%	91.6 %	0.82

TORQUE

FULL LOAD	LRT	BDT
37.1 lb.ft.	170 %	230 %

AMPERAGE INFORMATION

	230V	460V
Full Load Amps	57.4A	28.7A
Locked Rotor Amps	365A	182.5A
No Load Current	14A	7A
Usable at 208V	63.5A	

BEARING INFORMATION

DE Bearing	6309 C3
ODE Bearing	6209 C3
Grease Type	SKF LGHP 2
DE Regreasing Interval	3000 Hours
ODE Regreasing Interval	3000 Hours

ADDITIONAL DATA

F2 Suitable	Yes
Shaft Material	1045 Carbon Steel
Connection Diagram	230 / 460 V - 12 Lead Δ
Approximate Weight	309 lbs.


MOTOR DRAWING

Premium Efficiency Motor: **PEWWE25-36-256TC**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

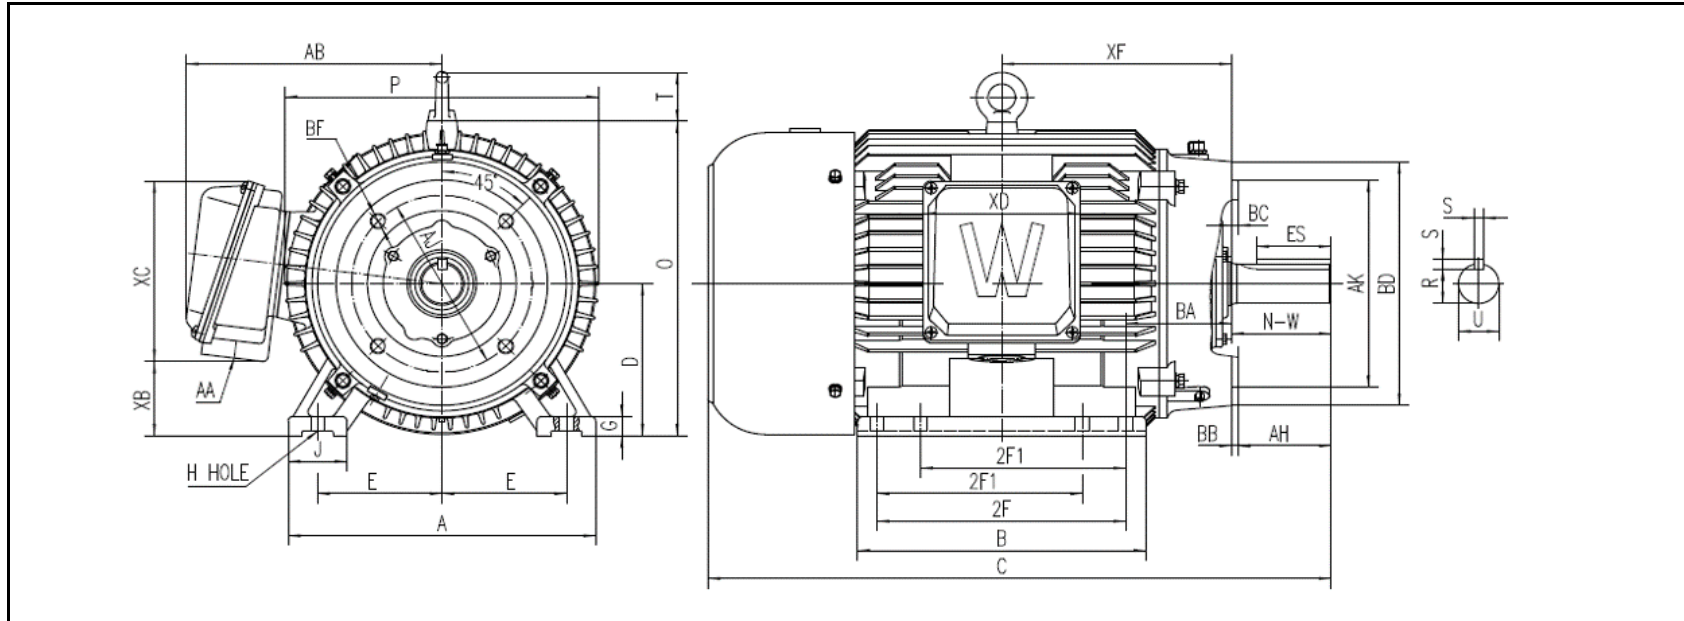

DIMENSION - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F	H	BA										
5	8.25	10	0.53	4.25	12.362	11.575	25.041	6.25	0.787	2.362	12.598	12.894	2.006	10.276

SHAFT & KEY					
S	ES	R	N-W	AH	U
0.375	2.91	1.416	4	3.75	1.625

TERMINAL BOX				
AA	XB	XC	XD	XF
1 1/2	3.047	7.406	6.299	9.23

FLANGE					
AJ	AK	BB	BD	BF	BC
7.25	8.5	0.25	10	1/2-13	0.25

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:

PEWWE25-36-256TC


Document Generated: 16-Feb-2023

Document ID:


Customer:

Motor Type	PEWWE				
Output Rating (HP)	25		FL Speed	3540	
Full Load Torque	37.1	lb.ft	LRT (%FLT)	170	460 volt FLA 28.7
Rotor Wk^2	1.35	lb-ft^2	BDT (%FLT)	230	230 volt FLA 57.4

SPEED VS TORQUE & CURRENT CURVE

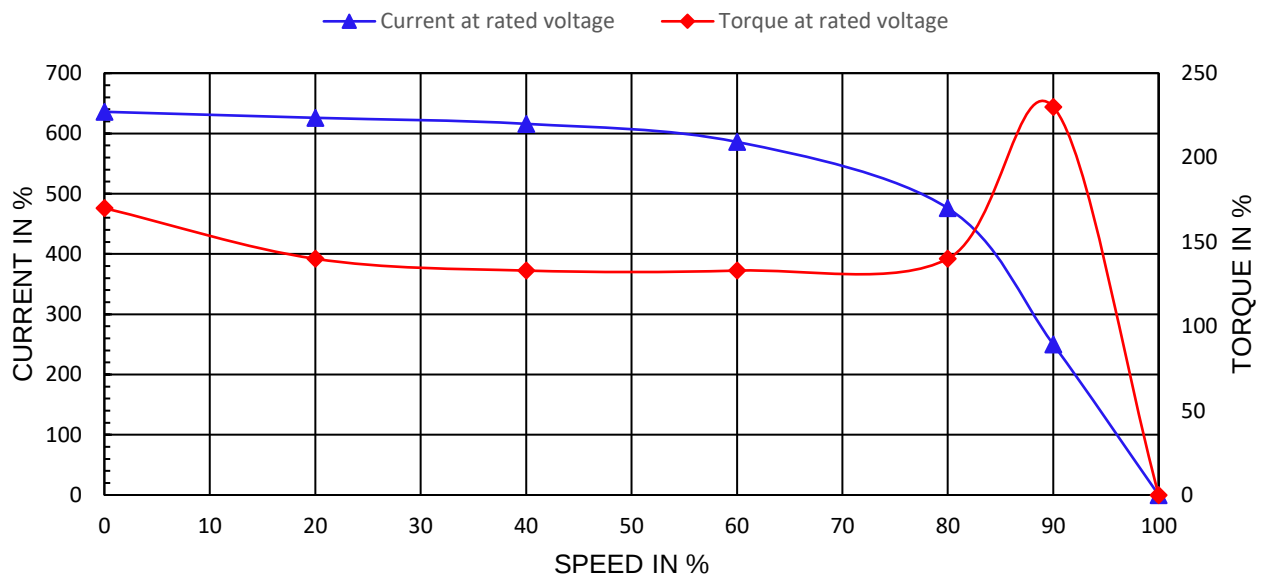

OUTPUT VS EFF., P.F. & CURRENT CURVE

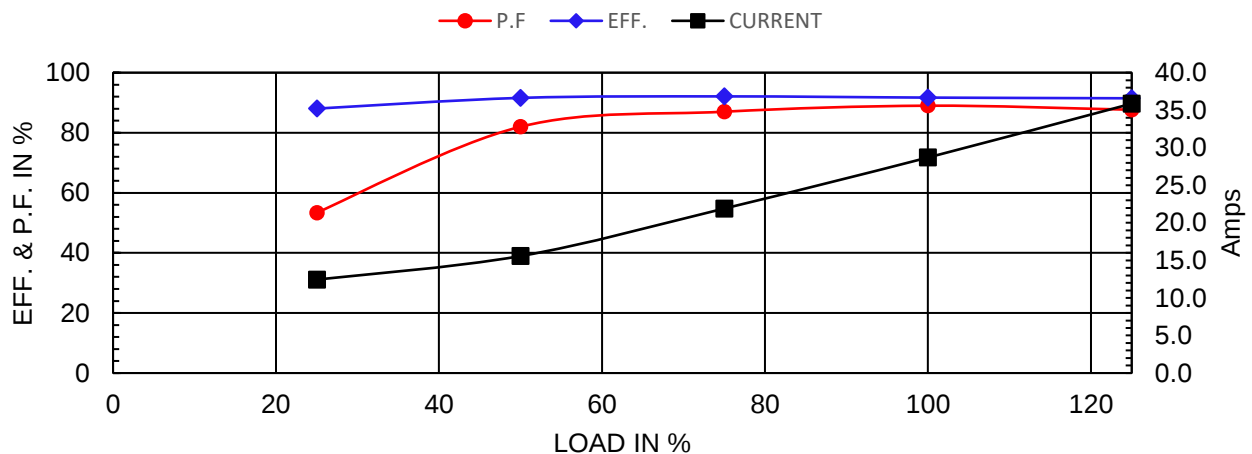

NAMEPLATE / WIRING

Premium Efficiency Motor:

PEWWE25-36-256TC

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 16-Feb-2023
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		NEMA Premium		3-PHASE INDUCTION MOTOR		259277 		CE CC006A	
Model				Ser No.				Low Voltage 6 4 5 7 8 9 12 10 11 1 2 3 L1 L2 L3	
HP		S.F.		IP		Encl			
Frame		P.F.		Code		Type			
Voltage	230/460	Hz		Ins Cl		Rating	°C Amb Cont		
Amps		RPM		Design		Date			
Nom.Eff.	FL	% 3/4	%	230/460V	10:1 CT 20:1 VT PWM VFD 1.0SF				
				DE Brng ODE Brng Grease type: LGHP 2 (compatible with polyrex)					
Class I DIV. 2 Groups A B C D		Amb.40°C	T3C(160°C)						
Class I Zone 2 IIC		Amb.55°C	T3A(180°C)						
50Hz	HP	V	A	rpm	S.F.1.0				
WorldWide Electric Corporation									

Model	PEWWE25-36-256TC						
HP	25	S.F.	1.25	IP	IP55	Encl	TEFC
Frame	256TC	P.F.	0.89	Code	G	Type	
Voltage	230/460 V	Hz	60 Hz	Ins Cl	F	Ambient	40°C
Amps	57.4/28.7	RPM	3540	Design	B	DE Brng	6309 C3
Nom.Eff.	FL	91.7%	3/4	92.1%		ODE Brng	6209 C3
						Grease type:	SKF LGHP 2
50Hz	25 HP	200/400 V	66.5/33.3 A	2935 rpm			