

DATA SHEET

Premium Efficiency Motor: **PEWWE25-9-326T**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 15-Feb-2023

Document ID:

Customer:

MOTOR INFORMATION

HP	25
RPM	900
Phase	3
Frequency	60 Hz
Voltage	230/460 V
Frame Size	326T
Enclosure	TEFC
Degree of Protection	IP55
Service Factor	1.25
Poles	8
Full Load Speed	875
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	G
Duty Cycle	S1 / Continuous
Slip	2.78%
NEMA Design	B
Moment of Inertia	9.32 lb.ft.^2
Locked Rotor Time (Hot)	12 seconds
Sound Pressure Level	68 dB(A)
Number of Starts	2 Cold/ 1 Hot
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bi-Directional
Area of Classification	Class I, Division 2, Groups A, B, C, D
Inverter Rating	10:1 CT / 20:1 VT PWM Type
Standard	NEMA MG-1
Approvals	CSA-US, CE

EFFICIENCY/POWER FACTOR

LOAD	EFF	P. F.
100%	90.2 %	0.79
75%	91.1 %	0.73
50%	90.6 %	0.61

TORQUE

FULL LOAD	LRT	BDT
150 lb.ft.	165 %	220 %

AMPERAGE INFORMATION

	230V	460V
Full Load Amps	65.7A	32.9A
Locked Rotor Amps	365A	182.5A
No Load Current	30.8A	15.4A
Usable at 208V	72.6A	

BEARING INFORMATION

DE Bearing	6312 C3
ODE Bearing	6311 C3
Grease Type	SKF LGHP 2
DE Regreasing Interval	6800 Hours
ODE Regreasing Interval	6800 Hours

ADDITIONAL DATA

F2 Suitable	Yes
Shaft Material	1045 Carbon Steel
Connection Diagram	230 / 460 V - 12 Lead Δ
Approximate Weight	540 lbs.


MOTOR DRAWING

Premium Efficiency Motor: **PEWWE25-9-326T**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

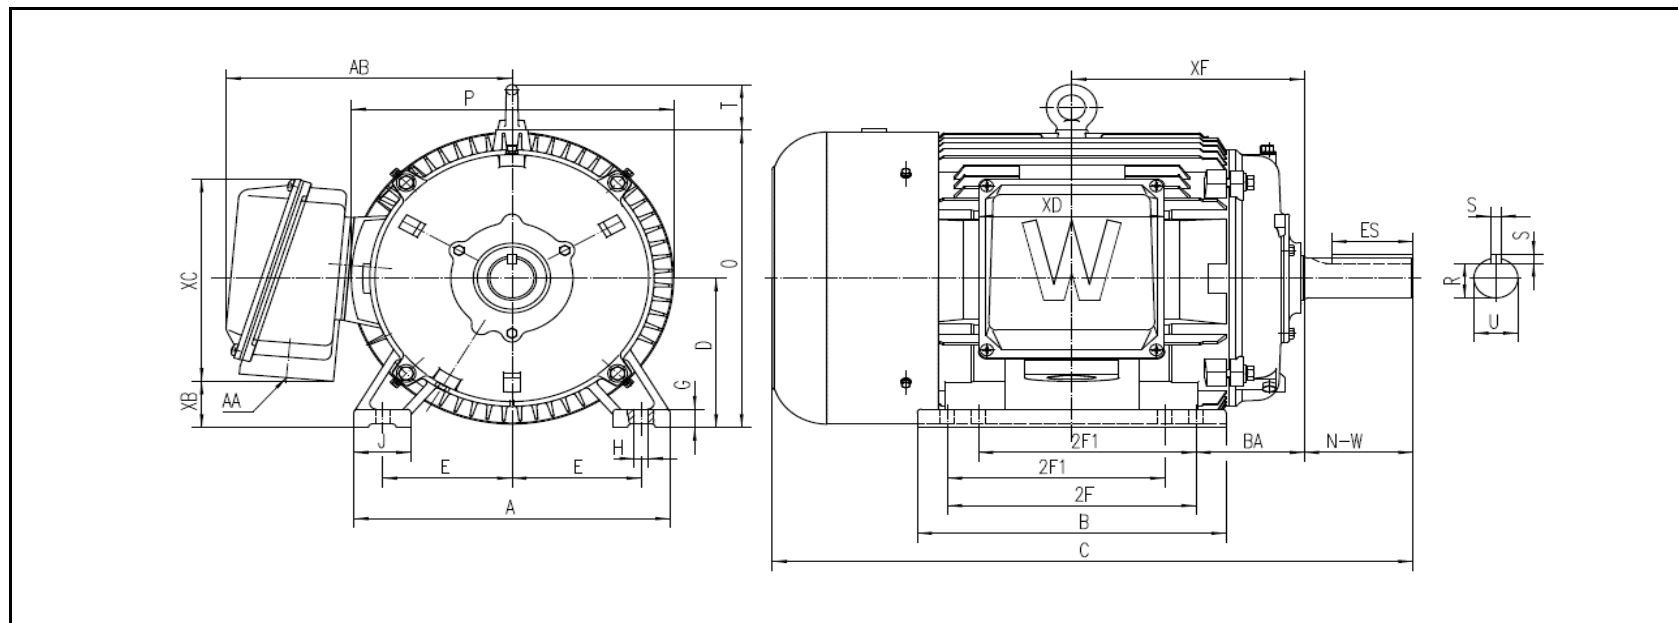

DIMENSION - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F	H	BA										
6.25	10.5	12	0.66	5.25	15.276	14.921	30.967	8	0.984	2.756	15.571	15.913	2.441	13.813

SHAFT & KEY				
S	ES	R	N-W	U
0.5	3.91	1.845	5.25	2.125

TERMINAL BOX				
AA	XB	XC	XD	XF
2	2.471	10.826	8.976	11.248

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:

PEWWE25-9-326T


Document Generated: 15-Feb-2023

Document ID:


Customer:

Motor Type	PEWWE		FL Speed	875		
Output Rating (HP)	25		LRT (%FLT)	165	460 volt FLA	32.9 A
Full Load Torque	150 lb.ft		BDT (%FLT)	220	230 volt FLA	65.7 A
Rotor Wk^2	9.32 lb-ft^2					

SPEED VS TORQUE & CURRENT CURVE

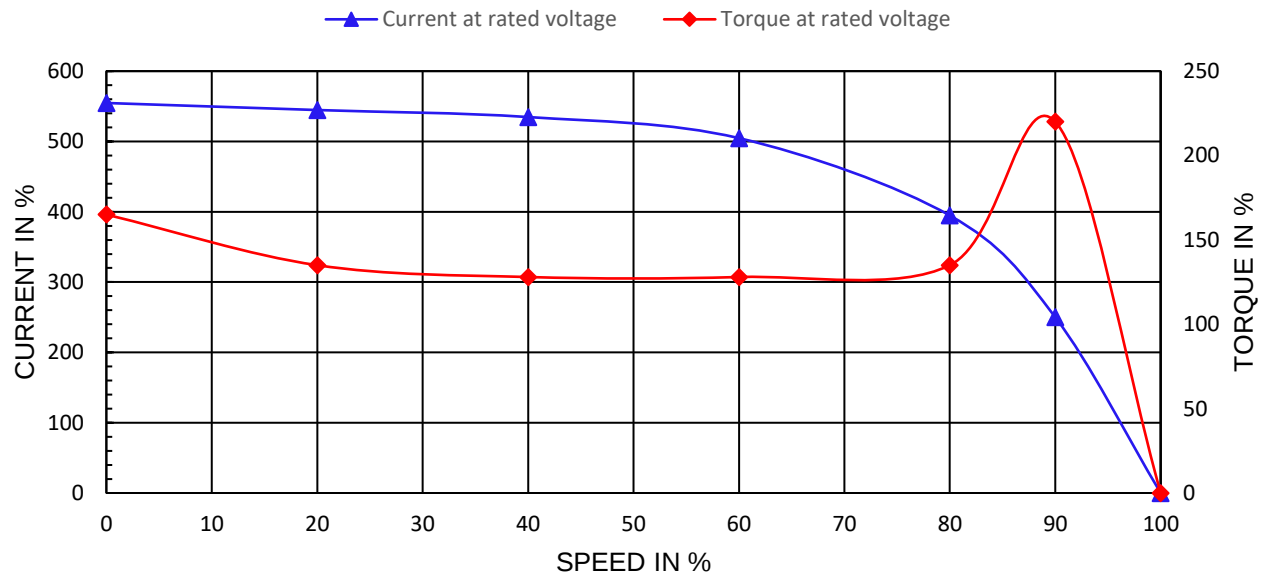

OUTPUT VS EFF., P.F. & CURRENT CURVE

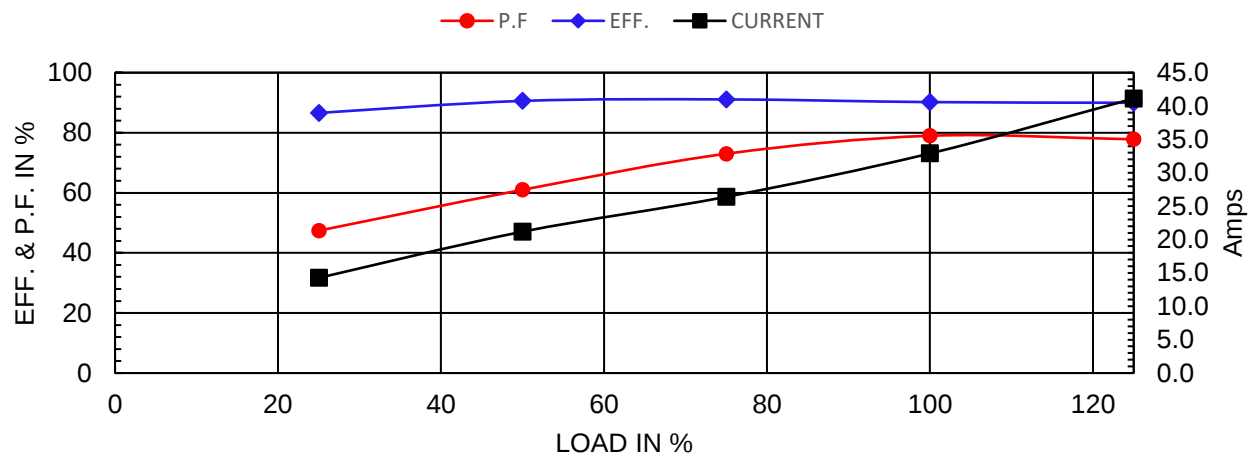

NAMEPLATE / WIRING

Premium Efficiency Motor:

PEWWE25-9-326T

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 15-Feb-2023
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		NEMA Premium		3-PHASE INDUCTION MOTOR		259277 	CE CC006A
Model		Ser No.					
HP		S.F.		IP		Encl	
Frame		P.F.		Code		Type	
Voltage	230/460	Hz		Ins Cl		Rating	°C Amb Cont
Amps		RPM		Design		Date	
Nom.Eff.	FL	% 3/4		% 230/460 V	10:1 CT 20:1 VT PWM VFD	1.0SF	
Class I DIV. 2 Groups A B C D				Amb.40°C			
Class I Zone 2 II C				Amb.55°C			
				DE Brng			
				ODE Brng			
				Grease type: LGHP 2 (compatible with polyrex)			
50Hz HP V A rpm 1.0SF							
WorldWide Electric Corporation							

Model PEWWE25-9-326T

HP 25 S.F. 1.25 IP IP55 Encl TEFC

Frame 326T P.F. 0.79 Code G Type

Voltage 230/460 V Hz 60 Hz Ins Cl F Ambient 40°C

Amps 65.7/32.9 RPM 875 Design B DE Brng 6312 C3

Nom.Eff. FL 90.2% 3/4 91.1% ODE Brng 6311 C3

Grease type: SKF LGHP 2

50Hz 25 HP 200/400 V 76.9/38.5 A 725 rpm